




PRODUCT PORTFOLIO



Franklin Electric

INDEX

PRODUCT PORTFOLIO AND BRANDS.....	4
COMPANY PROFILE	6
SUBMERSIBLE MOTORS	8
4" motors	9
4" Encapsulated motor - 1 Phase, PSC motor	10
4" Encapsulated motor - 1 Phase, 2-wire.....	10
4" Encapsulated motor - 1 Phase, 3-wire.....	10
4" Encapsulated motor - 3 Phase	10
4" Encapsulated motor - 3 Phase, High Thrust.....	10
4" Encapsulated permanent magnet motor	11
4" NBS4 Rewindable oil-filled motor	11
6" motors	12
6" Encapsulated Standard motor	12
6" 3- Encapsulated High Temp 90 °C motor	13
6" 3- Encapsulated permanent magnet motor.....	13
6" Rewindable motor	14
6" Rewindable Standard motor	14
6" NBS6 Rewindable oil-filled motor	15
8" motors	16
8" Encapsulated Standard motor	16
8" 3- Encapsulated High Temp 75 °C motor	16
8" Rewindable Standard motor	17
8" Rewindable permanent magnet motor.....	18
10" motors.....	19
10" Rewindable Standard motor	19
10" Rewindable permanent magnet motor	20
12" motors	21
12" Rewindable Standard motor	21
SUBMERSIBLE BOREHOLE PUMPS	22
VS4 Submersible pump	23
VS6 Submersible pump	23
VS8 Submersible pump	24
VSC 8-10-12 Submersible pump.....	24
CLOSE-COUPLED 5" PUMPS	25
ES Submersible pump.....	26
VN Submersible pump	26
VL Multistage pump.....	26
4"/6"/8"/10" HIGH EFFICIENCY SYSTEMS	27
4" High Efficiency System	28
4" High Efficiency Solar System	28
6" High Efficiency System CT.....	29
6" High Efficiency Solar System CT.....	29
8" High Efficiency System REW.....	30
8" High Efficiency Solar System REW	30
10" High Efficiency System REW.....	31
10" High Efficiency Solar System REW	31
VERTICAL MULTISTAGE CENTRIFUGAL PUMPS	32
EV Series - Vertical Multistage pumps	33
EM Series - Vertical Close-coupled Multistage pumps	34
EM DTm Series - Vertical Close-coupled Multistage pumps	35

BOOSTING SYSTEMS	36
GP Series.....	36
GD Series	36
HORIZONTAL MULTISTAGE PUMPS.....	37
EH/EHsp Series - Horizontal Multistage and Self-Priming pumps.....	38
EH DTm Series - Horizontal Multistage with DrivE-Tech MINI	39
DRAINAGE PUMPS.....	40
EGN Drainage pump.....	40
ED - EDV Drainage pump.....	40
EGT - EGF Drainage pump.....	41
END-SUCTION CENTRIFUGAL PUMPS	42
FNE - Bare Shaft pumps	42
FNC - Extended Shaft pumps.....	43
FNS - Stub Shaft pumps	43
CONSTANT PRESSURE SYSTEM.....	44
SubDrive Connect	44
VARIABLE FREQUENCY DRIVES (VFD)	45
DrivE-Tech	45
DrivE-Tech MINI	46
DrivE-Tech MINI Solar.....	46
PROTECTION / CONTROL	47
SubMonitor Motor Protection.....	47
SubStart SC	47
SubStart 3P.....	47
Subtronic SC.....	48
Subtronic 3P.....	48
Press-Tech / Press-Tech S	48
COV-BOX M Series.....	49
QC-AV/E Series.....	49
QC-AV Series.....	49
COV-BOX T Series.....	49
ACCESSORIES.....	50
Corrosion Protection 4"	50
Cooling shroud 4"/6"/8"/10"/12".....	50
Motor/Pump-Couplings	50
DC Disconnect.....	50
Double Plug Lead for Termination Kit	51
Filling Liquid.....	51
Float Switch.....	51
Flow Paddle Switch.....	52
Inline Flow Switch.....	52
Motor Filling Kit	52
Permanent Star Plug 6".....	52
Pressure Switch SubDrive - Constant-pressure Controller.....	53
PT100 sensor for 6" and 8" encapsulated motors	53
PT100 sensor for rewindable motors.....	53
PTC lead.....	53
Pump connection screw kits	54
Splicing Kit 1,5 - 95 mm ²	54
Surge Arrestors.....	54
Termination Kit 4".....	54
Revision change notice	55

Franklin Electric reserves the right to amend specification without prior notice
For the most up-to-date product information, visit franklinwater.eu.

MOVING WATER IS OUR BUSINESS

MULTISTAGE PUMPS 



EV
up to 115 m³/h, 326 m



EM - EM DTm
up to 17 m³/h, 104 m



EH - EHsp - EH DTm
up to 29 m³/h, 104 m



VL
up to 14 m³/h, 104 m



BOOSTER SYSTEMS
up to 84 m³/h, 104 m

END SUCTION PUMPS 



FNC - FNS - FNE
up to 240 m³/h, 100 m

DRAINAGE PUMPS 



ED - EDV - EGT - EGF
up to 36 m³/h, 20 m

HIGH EFFICIENCY SYSTEMS 

"6"/"8"/"10" HIGH EFFICIENCY SYSTEM" pumps" data-bbox="630 455 860 625"/>

4"/"6"/"8"/"10" HIGH EFFICIENCY SYSTEM
up to 250 kW

SUBMERSIBLE PRODUCTS 



ENCAPSULATED MOTORS
4"/"6"/"8" up to 150 kW



REWINDABLE MOTORS
6"/"8"/"10"/"12" up to 400 kW



OIL-FILLED MOTORS
4"/"6" up to 30 kW



SUBMERSIBLE PUMPS
4"/"6"/"8"/"10"/"12" up to 540 m³/h



SUBMERSIBLE MULTISTAGE PUMPS
up to 14 m³/h, 104 m

OUR PRODUCT PORTFOLIO - OUR BRANDS

Franklin Electric offers high-quality pumping systems for submersible well and surface applications.

COMPLETE SYSTEMS PROVIDER

The submersible pumping systems consist of perfectly matching components from motors and pumps to drives and controls to enhance efficiency, security and lifetime. The portfolio of **submersible motors** includes encapsulated and rewindable motors in the range from 0.25 kW up to 400 kW. While Franklin offers a full line of 4-inch motors for single and three-phase voltages and various frequencies, the product line ranges up to large submersible motor sizes up to 12" and 3300 V.

Under the brand name E-Tech, there is a wide range of **submersible pumps** from 4 inch up to 10 inch including close-coupled 5 inch pumps. Moreover, there are **vertical and horizontal Multistage pumps** with cutting edge technology in terms of performance and efficiency. The portfolio is completed with the range of **pressure boosting systems, small drainage and end suction pumps**.

The Coverco brand produces 4-inch and 6-inch **oil-filled rewindable motors** which are recognized in the market for their robustness and reliability. They are available from 0.37 up to 30 kW as single and three phase versions.

Besides the motor and pump portfolio, Franklin Electric has developed innovative products such as the **constant-pressure system** SubDrive Connect or various controls for submersible and surface pumping systems.

In consideration of environmental relief and energy saving Franklin Electric offers the **High Efficiency System** (HES) with first-class performance and power ratings up to 250 kW, increased lifetime and energy savings up to 21 %. Diverse Solar Pumping Systems enable the operation without electricity supply such as the 4"-10" Solar High Efficiency Systems.



Franklin Electric




OUR MARKETS

Agriculture: Relying on Mother Nature to irrigate crops, irrigate pastures or provide drinking water for animals is risky, especially when unpredictable drought periods hit the hardest. Franklin's agriculture pumping system provide stability to increase output, better predict crop yields and keep your animals strong and hydrated.

Commercial: At the turn of a faucet or flip of a lever, customers count on your commercial building to supply water at the pressures that serve their needs, whether the building is 1 story or 100. Franklin's complete line of pumping systems eliminate the worry and customer headaches that result from failed pumping equipment and help you overcome the challenge of supplying proper water pressure at varying structure heights.

Residential: Homeowners expect the tap to flow when they request water for any reason. So, whether your customers need water for general household use, desire lawn irrigation or want to boost their water pressure, our pumping systems provide the reliability you expect to minimize service calls and maximize customer satisfaction.

Industrial: To maximize production of your niche output, equipment cooling and washing systems along with general water usage systems are expected to run at peak efficiency for long durations. Franklin products not only transfer the water needed to maintain these efficiencies, but they provide protection to extend the life of your pumping system and ultimately the value of your industrial operation.



FRANKLIN ELECTRIC – MOVING WATER. MOVING FORWARD.

OUR VISION

Franklin Electric has grown from a small motor manufacturing company into a leading global provider of systems and components for moving water and fuel.

Named after America's pioneer electrical engineer, Benjamin Franklin, we continue to follow the core of our founders' strategy by continuously improving our products and processes to deliver valuable and innovative solutions that better serve our customers' needs.

Recognized as a technical leader in its products and services, Franklin serves customers around the world in residential, commercial, agricultural, industrial and municipal, and fueling applications.

Headquartered in Fort Wayne (Indiana/USA), Franklin employs 5,000 people globally, is present in over 50 worldwide locations and generates a sales turnover of 1.15 billion Euro.

Franklin Electric is committed to providing high quality products and services to our customers. Through our Franklin Leadership System, we are focused on a culture of continuous improvement to ensure we offer the best value to our customers.

Health, Safety, and the Environment

We touch the lives of millions of end-users of our products. We thoughtfully consider and continuously recognize the impact we make on the people of these communities and on the environment.

Our vision is to be an indispensable partner to our customers by consistently delivering products of the highest quality available in the market, providing training that reflects the importance of the safety of our customers and end-users and that protects the environment, and developing innovative products that deliver unparalleled performance and support sustainable energy sources. Our goal is to accomplish these objectives in ways that deliver value to our customers and shareholders.

Clean and readily available groundwater is vital to the health and well-being of much of the world's population, and the success of our water systems business is inextricably linked to this necessity. Pollution of groundwater aquifers represents a clear danger to human health and the environment. We therefore do our part, by lowering our own environmental impact by mandating clean, sustainable manufacturing and distribution processes, and by designing products that themselves protect against environmental damage.

Franklin Wells for the World Foundation

There are nearly one billion people in the world that don't have access to safe, clean drinking water. For most of us, a drink of fresh, clean water is only a few feet away. However, in many developing regions the nearest source of water is a few miles, and the only water they have is, in most cases, contaminated. These unclean water sources cause cholera, diarrhea, dehydration, dysentery, and in many cases, death. In one week, approximately 47,000 people die from a water-related disease; 90% of those deaths are children under five. That's approximately 6,000 children every day or one child every 15 seconds.

A majority of the world's fresh water is buried hundreds of feet below the ground, and Franklin Electric is the world leader in accessing groundwater. Since the inception of Franklin Wells for the World Foundation in 2010, we've impacted the lives of over 160,000 people by bringing this water to the surface.

Our mission is to provide safe, reliable, and cost-effective water supplies to suffering communities, focusing on Africa, where the need is greatest. It is our goal to provide fundraising and technical resources for water projects, as well as provide global partnerships for charitable organizations. Franklin Wells for the World is our effort and commitment to help end the global water crisis.



OUR VALUES

Focusing on a culture of continuous improvement, driven by our Key Factors for Success, we strive to be a leading provider of quality water and fueling systems, and will continue to expand our influence, while making a difference in the world.

QUALITY: The components and products are developed and manufactured according to the highest industry quality standards. In the state-of-the-art production and laboratory facilities, all products are tested to 100% to ensure maximum quality.

INNOVATION: Franklin Electric's commitment to innovation means that we evaluate and incorporate new technologies into our existing products, services and processes to continuously improve value to our customers. Franklin does not search for avant-garde technologies purely for the sake of change, but instead embraces innovations and solid solutions that make a sustainable difference.

SERVICE: Franklin Electric supports its customers beyond the commissioning of the system. The industry's leading problem-solving Technical Service Hotline professionals and Expert Field Service Engineers provide real answers in real time for troubleshooting and/or product questions. We are passionate about providing industry-leading technical service, robust training programs, and unwavering support and communication.

AVAILABILITY: We are committed to delivering our products and services when and where our customer needs them.

COST: We consider cost in every decision we make. We strive to control cost for the benefit of all our stakeholders.





SUBMERSIBLE MOTORS

Named after Benjamin Franklin, a pioneer in electrical engineering, Franklin Electric's core is the world's first reliable submersible electric motor for water systems, which has remained a staple of the water well industry.

More than 75 years after the establishment of Franklin Electric, we continue to manufacture and distribute improved versions of this unrivaled motor design all around the world, and have expanded our expertise to create innovative solutions, including pumps, electronics, and adjacent products, addressing modern industry challenges and serving our customers' needs.

SandFighter® sealing system

SandFighter® sealing system with SiC mechanical seal and sand slinger (6-12")



ISO 9001

All motors are manufactured in ISO 9001 certified plants and 100% tested



StatorSHIELD™ - Franklin encapsulation system

Franklin Electric encapsulated motors are equipped with hermetically-sealed windings. The Anti track stator resin mechanically supports the winding and provides fast heat dissipation.

Hydrodynamic liquid lubricated radial bearings

100 % maintenance free operation for all Franklin Electric encapsulated and rewindable motors. Oil-filled motors are equipped with axial and radial oil lubricated bearings.

Kingsbury type thrust bearing

High capacity Kingsbury type thrust bearing for 100 % maintenance free operation for all Franklin Electric encapsulated and rewindable motors.



Pressure-equalizing diaphragm

NEMA mounting design

Standard NEMA dimensions for all motors 4" - 8"

Best class winding wires in rewindable motors

The rewindable motors are equipped with best class winding wires.

The windings can easily be replaced.

The Franklin motors are factory filled with Franklin's FES non-toxic water soluble fill solution. The Coverco motors are filled with dielectric fluid (known as ›white oil‹), approved by the FDA.





4" SUPER STAINLESS ENCAPSULATED MOTOR

High-quality encapsulated motor with hermetically-sealed windings

OPTIONAL



FEATURES & BENEFITS

- 4" NEMA mounting design with studs
- Cable with round plug with extended jam nut (for better handling) in the conventional proven design
- Stator with solid 304SS end ring for better corrosion resistance and robustness
- Stainless steel splined shaft
- Stator shell in 316SS
- Factory filled with Franklin's FES93 motor fill solution
- Liquid lubricated radial bearings and High capacity Kingsbury type thrust bearing for 100 % maintenance free operation
- Field replaceable lead using Franklin's exclusive Water Bloc technology
- Pressure-equalizing diaphragm
- High efficiency electrical design for low operation costs
- Drinking water approvals
- Suitable for use in water with increased salinity



OPTIONS



- Built in lightning arrestors
- Special lead length up to 50 m
- Higher-graded materials: 316SS (only 3-wire and 3-phase motors)
- Motor kits (motor, motor short lead, control box, splicing kit)

STANDARD SPECIFICATION

- Electrical Designs: 1 ~ PSC / 2-wire 1~ / 3-wire 1~ / 3~
- Thrust load: 4 kN / 6.5 kN
- Nominal ambient temperature: 30 °C with 0.08 m/s cooling flow
- Voltage tolerance: -10 % / +6 % (50 Hz), ±10 % (60 Hz)
- Protection IP68 and insulation class B
- Frequency of starts: 20 starts/ hour (with min. 3 minutes resting time), equally distributed
- Installation orientation: Vertical / horizontal (shaft end heightened)
- Rotation counter clock wise facing shaft end (1 phase motors CW upon request; 3 phase motors rotation reversible)
- All motors with factory installed leads (1.50 m / 2.50 m)



Pollution Recovery version:

- Fluorelastomere (Viton®) rubber parts
- Special Polyurethane (PUR) lead assemblies
- 304SS (316SS Stator) graded Stainless Steel as Standard

Heat Pump motor version (3 phase version only):



Many modern heating systems extract heat that is stored in aquifer / river water. Such so-called two-pit or open systems require low-power, high efficiency 3-phase submersible motors. To meet the demands of this niche market, Franklin Electric has developed a special 4" encapsulated submersible motor range optimized for shallow settings and low power consumption available from 0.25 kW to 1.1 kW.



4" SUPER STAINLESS ENCAPSULATED MOTOR

4" ENCAPSULATED MOTOR - 1 PHASE, PSC MOTOR

- Ratings: 0.25 - 2.2 kW; Thrust load 4 kN
- Single phase motor for operation with external run capacitor
- Electrically optimized to offer reliable pump starting over a wide range of incoming voltages.
- Optimized performance and protection with Franklin SubStart/ SubTronic control boxes
- Protection requirements: EN 60947-4-1



4" ENCAPSULATED MOTOR - 1 PHASE, 2-WIRE

- Ratings: 0.37 - 1.1 kW; Thrust load 4 kN
- Integrated start components for the operation without external controls or capacitors, minimal installation work
- Reverse impact torque for loosening sand-locked pumps
- Factory-equipped with automatic reset overload and surge protectors, no start-up device required
- Integrated lightning arrestor (max. 230 V) and overload
- Electrically optimized to offer reliable pump starting over a wide range of incoming voltages.
- Protection requirements: EN 60947-4-1



4" ENCAPSULATED MOTOR - 1 PHASE, 3-WIRE

- Ratings: 0.25 - 2.2 kW; Thrust load 4 kN
High Thrust version: 2.2 - 3.7 kW, Thrust Load: 6.5 kN
- Single phase motor with highest achievable starting torque for operation with external start & run capacitor
- Ideally suited for applications where starting torque is paramount and 3 phase motors cannot be used.
- It should ideally be combined to the Franklin Electric 3-wire control boxes for maximum system performance, protection and warranty.
- Protection requirements: EN 61947-4-1
- Optionally: motor complete in 316SS with SiC seal



4" ENCAPSULATED MOTOR - 3 PHASE

- Ratings: 0.37 - 3.0 kW; Thrust load 4 kN
- Three phase motor with highest efficiency and maximum product life under various load conditions
- Optimized performance and protection with Franklin SubStart 3P / SubTronic 3P control boxes
- Protection requirements: EN 60947-4-1
- Optionally: motor complete in 316SS with SiC seal, Special voltages
- **Solar Version:**  Optimized design for use with solar panels
- Ratings: 0.75 - 1.1 kW
- Optimized performance with Franklin Drive-Tech MINI



4" ENCAPSULATED MOTOR - 3 PHASE, HIGH THRUST

- Ratings: 2.2 - 9.3 kW, Thrust load: 6.5 kN
- Three phase motor with highest efficiency and maximum product life under various load conditions
- Optimized performance and protection with Franklin SubStart 3P / SubTronic 3P control boxes
- Optionally: motor complete in 316SS with SiC seal, Special voltages
- Protection requirements: EN 60947-4-1
- Pressure-equalizing diaphragm, spring pre-loaded





4" SUPER STAINLESS ENCAPSULATED MOTOR

4" ENCAPSULATED PERMANENT MAGNET MOTOR

Synchronous encapsulated motor for first-class efficiency

- NEMA mounting design
- Stainless steel splined shaft
- StatorShield™ - Franklin encapsulation system
- Factory filled with Franklin's FES93 motor fill solution
- Liquid lubricated radial bearings and High capacity Kingsbury type thrust bearing for 100 % maintenance free operation
- Field replaceable lead using Franklin's exclusive Water Bloc technology
- Pressure-equalizing diaphragm
- Protection IP68 and insulation class B
- Frequency of starts: 20 starts/ hour (with min. 3 minutes resting time), equally distributed
- All motors with factory installed leads 1.50 / 2.50 m
- Installation orientation: Vertical / horizontal (shaft end heightened)

- Ratings:
0.55 - 3.0 kW; Thrust load 4 kN
3.0 - 7.5 kW; Thrust load 6.5 kN
- Voltage: 220 V / 400 V (100 Hz)
- Voltage tolerance: $\pm 10\% U_N$
- Nominal ambient temperature: 30 °C with 0.08 m/s cooling flow

OPTIONAL



OPTION



- High Efficiency System Package
 - Synchronous 4" NEMA motor
 - Submersible pump
 - Variable Frequency Drive
 - Matching output filter
- 4" High Efficiency System



4" REWINDABLE OIL-FILLED MOTOR

4" NBS4 REWINDABLE OIL-FILLED MOTOR

Rewindable oil-filled submersible motors

FEATURES & BENEFITS

- NEMA mounting design
- Stainless steel splined shaft
- Motors are pre-filled with a dielectric fluid (known as „white oil“), approved by the FDA and other international pharmacological institutes
- The motors can be powered with single-phase and three-phase power supply.
- Cable material compliant with drinking water standards (KTW)
- Reliable operation in wells with diameters of $\geq 4"$ for water up to 30 °C
- Axial and radial oil lubricated bearings allow maintenance-free operation
- Pressure compensation inside the motor is ensured by a special membrane
- Sand protection / Mechanical seal allow optimal operation even in the presence of sand in the well
- Excellent efficiency and low operating costs

OPTIONS

- Special voltages
- Silicon carbide mechanical seal



STANDARD SPECIFICATION

- Motor ratings:
Single-phase: 0.37 - 4.0 kW
Three-phase: 0.37 - 7.5 kW
- Standard rated voltage:
Single-phase: 210-220-230 V (50 Hz)
Three-phase: 380-415 V (50 Hz); 460 V (60 Hz)
- Nominal ambient temperature: 30 °C with 0.08 m/s cooling flow
- Voltage tolerance: $\pm 10\%$
- Protection IP68, Insulation class F
- Motor protection:
thermal relays in compliance with EN 60947-4-1, trip class 10 or 10 A, trip time < 10 s. at $5 \times I_N$
- Frequency of starts: 30 starts/ hour
- Thrust load: 1500 N, 2500 N, 4500 N (K)
- Vertical and horizontal operation (for horizontal operation authorization by Franklin Electric Technical Department necessary)
- Cable dimensions: 4 x 1.5 mm²



6" ENCAPSULATED MOTOR

High-quality encapsulated motor with hermetically-sealed windings



6" ENCAPSULATED STANDARD MOTOR

FEATURES & BENEFITS

- Double-flange NEMA mounting design
- Stainless steel splined shaft
- StatorShield™ - Franklin encapsulation system
- Factory filled with Franklin's FES91 motor fill solution
- Liquid lubricated radial bearings and High capacity Kingsbury type thrust bearing for 100 % maintenance free operation
- Field replaceable lead using Franklin's exclusive Water Bloc technology
- Pressure-equalizing diaphragm, spring pre-loaded
- SandFighter™ sealing system with SIC mechanical seal and sand slinger
- High efficiency electrical design for low operation costs
- Drinking water approvals



OPTIONS

- Higher-graded materials: 316SS and 304SS
- Other voltages
- 45 kN High Thrust version (Standard in 37 kW and 45 kW)
- Retrofittable PT 100 temperature sensor
- Built-in PTC temperature sensor
- Integrated SubMonitor™ sensor (Standard for 37 and 45 kW)
- Special lead lengths up to 50 m



STANDARD SPECIFICATION

- Ratings: 4 - 45 kW
- Thrust load:
 - 15.5 kN: 4 - 22 kW
 - 27.5 kN: 30 kW
 - 45 kN: 37 - 45 kW
- Max. storage temperature - 15 °C to + 60 °C
- Nominal ambient temperature (with 0.16 m/s cooling flow):
 - 4 - 30 kW: 30 °C, 37 - 45 kW: 50 °C
- Standard Voltage:
 - 50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / ± 10 % U_N
- Protection IP68 and insulation class F
- Motor protection: DIN 61947-4-1
- Frequency of starts: 20 starts/ hour (with min. 3 minutes resting time), equally distributed
- DOL / YΔ - start (pos. of cables 90 °)
- Motor lead length: 4 m
- Vertical and horizontal operation, shaft upwards
- Rotation counter clock wise facing shaft end (Rotation reversible for 3 phase motors)
- Integrated SubMonitor™ sensor (37 and 45 kW)





6" ENCAPSULATED MOTOR

6" 3~ ENCAPSULATED HIGH TEMP 90 °C MOTOR

Encapsulated motor for reliable operation with ambient temperatures up to 90 °C

- HighTemp 90 °C version for reliable operation with ambient temperatures up to 90 °C (with 0.16 m/s cooling flow)
- Ratings: 3.7 - 30 kW
- Liquid lubricated radial bearings and High capacity Kingsbury type thrust bearing for 100 % maintenance free operation
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- Increased thrust capacity up to 30 °C
- Factory filled with Franklin's FES92 motor fill solution for frost protection down to -15 °C storage temperature.
- No cooling flow in larger wells necessary (12" / open reservoirs) up to 30 °C ambient temperature
- Installation orientation: Vertical / horizontal (shaft end heightened)



High Temp



- High temperature leads
- All features of the Standard version
 - Standard 6" Encapsulated motor



OPTIONS

- Other voltages
- Higher-graded materials: 316SS
- 45 kN High Thrust version (Standard in 22 kW and 30 kW)
- Retrofittable PT 100 temperature sensor
- HighTemp drop cable on demand



6" 3~ ENCAPSULATED PERMANENT MAGNET MOTOR

Synchronous encapsulated motor for first-class efficiency

- Permanent Magnet Technology
- Up to 15 points (21 %) improved motor efficiency*
- Investment payback of less than two years
- Ratings: 4 - 45 kW, 380 V (100 Hz)
- Voltage Tolerance: $\pm 10 \% U_N$
- Nominal speed: 3000 rpm (100 Hz)
- Nominal ambient temperature: 30 °C (≤ 22 kW: with 0.16 m/s cooling flow, ≥ 26 kW: with 0.5 m/s cooling flow)
- All features of the Standard version
- Installation orientation: Vertical / horizontal (shaft end heightened)



OPTIONS

- 45 kN High Thrust version
- Higher-graded materials in 304SS and 316SS
- Retrofittable PT 100 temperature sensor
- Special lead lengths up to 50 m
- 60 Hz electrical designs



- High Efficiency System package
 - Synchronous subm. NEMA motor
 - Submersible pump
 - Variable frequency drive
 - Matching output filter
- 6" High Efficiency System



6" REWINDABLE MOTOR

Rewindable motors with best class winding wires

**SAND
FIGHTER**

STAINLESS STEEL
304

OPTIONAL
STAINLESS STEEL
316

OPTIONAL
STAINLESS STEEL
904L



6" REWINDABLE STANDARD MOTOR

FEATURES & BENEFITS

- 6" NEMA mounting design with studs
- Stainless steel splined shaft
- Factory filled with Franklin's FES93 motor fill solution
- Liquid lubricated radial bearings and High capacity Kingsbury type thrust bearing for 100 % maintenance free operation
- Pressure-equalizing diaphragm, spring pre-loaded
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- High efficiency electrical design for low operation costs
- Drinking water approvals

STANDARD SPECIFICATION

- Ratings: 4 - 37 kW
- Max. storage temperature - 15 °C to + 60 °C
- Standard motor with PVC winding insulation (37 kW Standard with PE2/PA insulation)
- Nominal ambient temperature: 30 °C with 0.2 m/s cooling flow for 4 - 15 kW motors with 0.5 m/s cooling flow for 18.5 - 37 kW motors
- Standard Voltage: 380 - 415 V (50 Hz), 460 V (60 Hz)
- Voltage Tolerance: 50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / ± 10 % U_N
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 20 starts/ hour (with min. 3 minutes resting time), equally distributed
- DOL / YΔ - start (pos. of cables 90 °)
- Motor lead length: 4 m
- Installation orientation: Vertical / horizontal (shaft end heightened) - 37 kW motors may not be installed in horizontal position)
- Rotation counter clock wise facing shaft end (rotation reversible)
- All motors with factory installed leads

OPTIONS

- Higher-graded materials: 316SS and 904L
- Special voltages
- Retrofittable PT 100 temperature sensor
- Special lead lengths up to 50 m
- Motors up to 30 kW with PE2/PA winding insulation for max. ambient temperature of 50 °C (Standard cooling flows, 37 kW: max. 45 °C)



6" REWINDABLE OIL-FILLED MOTOR

Rewindable oil-filled submersible motors



6" NBS6 REWINDABLE OIL-FILLED MOTOR

FEATURES & BENEFITS

- NEMA mounting design
- Motors are pre-filled with a dielectric fluid (known as „white oil“), approved by the FDA and other international pharmacological institutes
- Cable material compliant with drinking water standards (KTW)
- Reliable operation in wells with diameters of $\geq 6''$ for water up to 30 °C
- Axial and radial oil lubricated bearings allow maintenance-free operation
- Sand protection / Mechanical seal allow optimal operation even in the presence of sand in the well
- Excellent efficiency and low operating costs

OPTIONS

- Special voltages
- Silicon carbide mechanical seal
- YΔ start (position of cables 90°)
- Special lead lengths (on request)



STANDARD SPECIFICATION

- Motor ratings: Three-phase: 4.0 - 30.0 kW
- Standard rated voltage: Three-phase: 380-415 V (50 Hz); 460 V (60 Hz)
- Nominal ambient temperature: 30 °C with 0.16 m/s cooling flow (30 kW: min 0.5 m/s)
- Voltage tolerance: $\pm 10\%$
- Protection IP68, Insulation class F
- Motor protection: thermal relays in compliance with EN 60947-4-1, trip class 10 or 10 A, trip time < 10 s. at $5 \times I_N$
- Frequency of starts: 20 starts/ hour
- DOL / YΔ - start (pos. of cables 90 °)
- Thrust load: 10 000 N, 20 000 N
- Vertical and horizontal operation (for horizontal operation up to 11.0 kW authorization by Franklin Electric Technical Department)
- 4 meter removable cable, cable dimensions: 4 mm² / 8.3 mm²



8" ENCAPSULATED MOTOR

High-quality encapsulated motor with hermetically-sealed windings



8" ENCAPSULATED STANDARD MOTOR

FEATURES & BENEFITS

- Double flange NEMA mounting design
- Stainless steel splined shaft
- StatorShield™ - Franklin encapsulation system
- Factory filled with Franklin's FES91 motor fill solution for frost protection down to -15 °C storage temperature.
- Liquid lubricated radial bearings and High capacity Kingsbury type 45 kN thrust bearing for 100 % maintenance free operation
- Field replaceable lead using Franklin's exclusive Water Bloc technology
- Pressure-equalizing diaphragm, spring pre-loaded
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- High efficiency electrical design for low operation costs
- Drinking water approvals

OPTIONS

- Higher-graded materials: 316SS
- Special voltages
- Retrofittable PT 100 temperature sensor



STANDARD SPECIFICATION

- Ratings: 30 - 150 kW
- Max. storage temperature - 15 °C to + 60 °C
- Nominal ambient temperature: 30 °C (with 0.16 m/s cooling flow)
- Standard Voltage:
50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / ± 10 % U_N
- Protection IP68 and insulation class F
- Motor protection: DIN 61947-4-1
- Frequency of starts: 10 starts/ hour (with min. 3 minutes resting time), equally distributed
- DOL / YΔ - start (pos. of cables 90 °)
- Motor lead length: 4 m
- Vertical and horizontal operation, shaft upwards
- Rotation counter clock wise facing shaft end (Rotation reversible)
- Integrated sensor for SubMonitor™
► SubMonitor™ Protection



8" 3~ ENCAPSULATED HIGH TEMP 75 °C MOTOR

Encapsulated motor for reliable operation with ambient temperatures up to 75 °C

- HighTemp 75 °C version for reliable operation with ambient temperatures up to 75 °C (with 0.16 m/s cooling flow)
- Ratings: 30 - 110 kW
- Increased thrust capacity up to 30 °C
- Factory filled with Franklin's FES92 motor fill solution / FES92 for frost protection down to -15 °C storage temperature.
- No cooling flow in larger wells necessary (12" / open reservoirs) up to 30 °C ambient temperature
- High temperature leads
- All features of the Standard version
► Standard 8" Encapsulated motor



OPTIONS

- Higher-graded materials: 316SS
- Special voltages
- Motor lead length: 8 m
- HighTemp drop cable on demand





8" REWINDABLE MOTOR

Rewindable motors with best class winding wires



8" REWINDABLE STANDARD MOTOR

FEATURES & BENEFITS

- 8" double flange NEMA mounting design
- Stainless steel splined shaft
- Factory filled with Franklin's FES93 motor fill solution for frost protection down to -15 °C storage temperature
- Liquid lubricated radial bearings and High capacity Kingsbury type 45 kN thrust bearing for 100 % maintenance free operation
- Pressure-equalizing diaphragm, spring pre-loaded
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- High efficiency electrical design for low operation costs
- Drinking water approvals

STANDARD SPECIFICATION

- Ratings: 30 - 93 kW
- Max. storage temperature - 15 °C to + 60 °C
- Standard motor with PVC winding insulation
- Nominal ambient temperature: 30 °C
with 0.2 m/s cooling flow for 30 - 52 kW motors
with 0.5 m/s cooling flow for 55 - 93 kW motors
- Standard Voltage: 380 - 415 V (50 Hz), 460 V (60 Hz)
- Voltage Tolerance: 50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / ± 10 % U_N
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 10 starts/ hour
(with min. 3 minutes resting time),
equally distributed
- DOL / YΔ - start (pos. of cables 90 °)
- Motor lead length: 6 m
- Installation orientation: Vertical / horizontal
(shaft end heightened) - 93 kW motors may
not be installed in horizontal position)
- Rotation counter clock wise facing shaft end
(rotation reversible)
- All motors with factory installed leads

OPTIONS



- Higher-graded materials: 316SS and 904L
- Special voltages
- Retrofittable PT 100 temperature sensor
- PE2/PA winding insulation for max. ambient temperature of 50 °C (Standard cooling flows)
- Special lead lengths on request



8" REWINDABLE MOTOR

Synchronous rewindable motor for first-class efficiency

8" REWINDABLE PERMANENT MAGNET MOTOR

FEATURES & BENEFITS

- 8" double flange NEMA mounting design
- High efficiency electrical design for low operation costs
- SandFighter™ sealing system with SIC mechanical seal and sand slinger
- Factory filled with Franklin's FES93 motor fill solution for frost protection down to -15 °C storage temperature
- Drinking water approvals
- Stainless steel splined shaft
- Liquid lubricated radial bearings and High capacity Kingsbury type 45 kN thrust bearing for 100 % maintenance free operation
- Pressure-equalizing diaphragm, spring pre-loaded

STANDARD SPECIFICATION

- Ratings: 75 / 100 / 150 kW
(100 Hz - 3000 rpm, 120 Hz - 3600 rpm)
- Max. storage temperature - 15 °C to + 60 °C
- Standard motor with PE2/PA winding insulation
- Nominal ambient temperature: 30 °C with 0.5 m/s cooling flow
- System Supply Voltage: 400 V (100 Hz) / 460 V (120 Hz)
- Voltage Tolerance: $\pm 10\% U_N$
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 10 starts/ hour
(with min. 3 minutes resting time),
equally distributed
- DOL-start
- All motors with factory installed leads,
motor lead length: 6 m
- Motors installation orientation:
Vertical / horizontal (shaft end heightened)
150 kW motors may not be installed
horizontally
- Rotation counter clock wise facing shaft end
(rotation reversible)



OPTIONS

- Higher-graded materials: 316SS, 904L
- Special voltages
- Retrofittable PT 100 temperature sensor
(VFD PT100 Plug-in card necessary, order no. 308 170 202)
- Special lead lengths





10" REWINDABLE STANDARD MOTOR

Rewindable motors with best class winding wires



10" REWINDABLE STANDARD MOTOR

FEATURES & BENEFITS

- 10" double flange mounting design
- Factory filled with Franklin's FES93 motor fill solution for frost protection down to -15 °C storage temperature
- High capacity Kingsbury type liquid lubricated 60 kN thrust bearing and radial bearings for 100 % maintenance free operation
- Pressure-equalizing diaphragm, spring pre-loaded
- Stainless Steel keyed shaft
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- High efficiency electrical design for low operation costs
- Drinking water approvals

STANDARD SPECIFICATION

- Ratings: 85 - 185 kW
- Max. storage temperature - 15 °C to + 60 °C
- Standard motor with PVC winding insulation
- Nominal ambient temperature: 25 °C with 0.5 m/s cooling flow
- Standard Voltage: 380 - 415 V (50 Hz), 460 V (60 Hz)
- Voltage Tolerance: 50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / ± 10 % U_N ,
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 10 starts/ hour (with min. 3 minutes resting time), equally distributed
- DOL / Δ - start (pos. of cables 90 °)
- Motor lead length: 6 m
- Installation orientation: Vertical / horizontal (shaft end heightened)
- Rotation counter clock wise facing shaft end (Rotation reversible)
- All motors with factory installed leads

OPTIONS

- Higher-graded materials: 316SS and 904L
- Special voltages
- Retrofittable PT 100 temperature sensor
- PE2/PA winding insulation for max. ambient temperature of 45 °C (Standard cooling flows)
- Special lead lengths on request



10" REWINDABLE MOTOR

Synchronous rewindable motor for first-class efficiency

10" REWINDABLE PERMANENT MAGNET MOTOR

FEATURES & BENEFITS

- 10" double flange mounting design
- Factory filled with Franklin's FES93 motor fill solution, for frost protection down to -15 °C storage temperature
- High capacity Kingsbury type liquid lubricated 60 kN thrust bearing and radial bearings for 100 % maintenance free operation
- Pressure-equalizing diaphragm, spring pre-loaded
- Stainless Steel keyed shaft
- SandFighter™ sealing system with SIC mechanical seal and sand slinger
- High efficiency electrical design for low operation costs
- Drinking water approvals

STANDARD SPECIFICATION

- Motor range: 200 - 250 kW
(100 Hz - 3000 rpm)
230 - 290 kW (120 Hz - 3600 rpm)
- Max. storage temperature - 15 °C to + 60 °C
- Standard motor with PE2/PA winding insulation
- Nominal ambient temperature: 30 °C with 0.5 m/s cooling flow
- System Supply Voltage: 400 V (100 Hz) / 460 V (120 Hz)
- Voltage Tolerance: $\pm 10\% U_N$
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 10 starts/ hour
(with min. 3 minutes resting time), equally distributed
- Motor lead length: 6 m
- Motors installation orientation: Vertical / horizontal
(shaft end heightened)
250 kW motors may not be installed horizontally
- Rotation counter clock wise facing shaft end
(rotation reversible)
- All motors with factory installed leads



OPTIONS

- Higher-graded materials: 316SS, 904L
- Special voltages
- Retrofittable PT 100 temperature sensor
(VFD PT100 Plug-in card necessary, order no. 308 170 202)
- Special lead lengths





12" REWINDABLE MOTOR

Rewindable motors with best class winding wires



12" REWINDABLE STANDARD MOTOR

FEATURES & BENEFITS

- 12" double flange mounting design
- Factory filled with Franklin's FES93 motor fill solution for frost protection down to -15 °C storage temperature
- High capacity Kingsbury type liquid lubricated thrust bearing and radial bearings for 100 % maintenance free operation
- Pressure-equalizing diaphragm
- Stainless Steel keyed shaft
- SandFighter™ sealing system with SIC mechanical seal and sand slinger is standard
- High efficiency electrical design for low operation costs
- Drinking water approvals

STANDARD SPECIFICATION

- Ratings: 185 - 400 kW
- Max. storage temperature - 15 °C to + 60 °C
- Nominal ambient temperature: 30 °C with 0.5 m/s cooling flow
- Standard Voltage:
380 - 415 V (50 Hz), 460 V (60 Hz), 500 V (50 Hz), 1000 V (50 Hz)
- Voltage Tolerance:
50 Hz: 380-415 V - 10 % / + 6 % U_N [380 - 415 V = (380 - 10%) - (415 + 6 %)]; 60 Hz: 460V / $\pm 10 \% U_N$,
- Protection IP68
- Motor protection: DIN 61947-4-1
- Frequency of starts: 5 starts/ hour (with min. 3 minutes resting time), equally distributed
- DOL / $Y\Delta$ - start (pos. of cables 90 °)
- Motor lead length: 6 m
- Installation orientation: Vertical / horizontal (shaft end heightened)
- Rotation counter clock wise facing shaft end (rotation reversible)
- All motors with factory installed leads

OPTIONS

- Higher-graded materials: 316SS
- Special voltages
- Retrofittable PT 100 temperature sensor
- 80 kN Thrust load version
- Special lead lengths on request





SUBMERSIBLE BOREHOLE PUMPS

Franklin Electric offers a wide array of submersible pumps with flows up to 540 m³/h and heads up to 700 m. They perfectly match motors with power ratings up to 400 kW. The submersible pumps feature proven components, withstand the harshest environments and provide superior performance for numerous applications.

All pumps and parts are manufactured to precision tolerances. Every single component is inspected and tested prior to assembly. To assure the very best quality, all pumps are tested again according to the highest industry standards.

Built-in check valve

to protect the pump against water hammer risk

Aluminium oxide guide journal sleeve

Stainless Steel impellers and diffusers

VS 6"-8":
Radial / Semiaxial design
VSC: Semiaxial design

Floating neck ring

VS 6"-8": PPS or PTFE
VSC 8"-10": NBR
VSC 12": PTFE

Casted Stainless Steel diffusers and impellers

for high corrosion and abrasion resistance


A316 upper journal sleeve

Diffusers

in Noryl

Floating impellers

in Polycarbonate

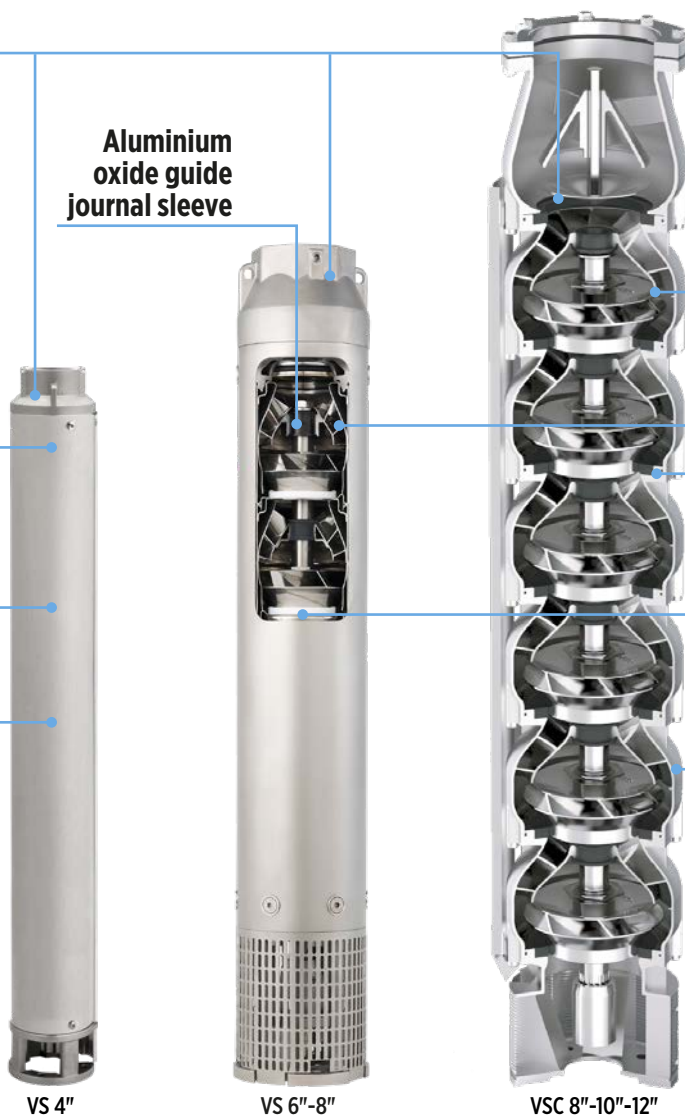

VS 4"

VS 6"-8"

VS 8"-10"-12"

APPLICATIONS



Municipal water works, waste water



Fountains



Water Distribution Pressure Boosting



Irrigation, Sprinklers Water treatment plants



Filtration Reverse osmosis



Industrial cooling and processing



Residential and farm wells and drainage



Mining industry, Drainage, Dewatering



Fire-fighting equipment



Water supply to and from tanks, reservoir and wells



Lifting and distribution of a wide range of liquids



Autoclave and cistern charge and discharge



Turf and landscape Greenhouses, nurseries



Food industry General industry

SUBMERSIBLE BOREHOLE PUMPS

VS4 SUBMERSIBLE PUMP



FEATURES & BENEFITS

- Compact, reliable and suited to operate in horizontal or vertical position
- Designed to operate efficiently with Franklin Electric submersible motors / NEMA Standard motor adapter
- Hydraulic design enhances overall efficiency thus reducing energy consumption and making the pumping systems more cost effective
- Built-in check valve to protect the pump against water hammer risk
- Floating impellers to grant a better performance and longer life for the pump against abrasion
- Suitable for chemically and mechanically non aggressive liquids

OPTIONS

- Cooling shroud



STANDARD SPECIFICATION

- Models: VS 1-2-3-4-6-7-8-10-15
- Flow: up to 24 m³/h (50 Hz)
- Head: up to 278 m (50 Hz)
- Outlet diameter:
1" ¼ for VS 1-2-3-4,
2" for VS 6-7-8-10-15
- Water temperature range: from 0 °C to 40 °C
- Maximum allowable amount of sand: 100 g/m³,
solid dimension max. 2 mm
- Rotation: counter clockwise
when looking into the discharge



VS6 SUBMERSIBLE PUMP



FEATURES & BENEFITS

- Compact, reliable and suited to operate in horizontal position
- Designed to operate efficiently with Franklin Electric submersible motors / NEMA Standard motor adapter
- Hydraulic design enhances overall efficiency thus reducing energy consumption and making the pumping systems more cost effective
- Built-in check valve to protect the pump against water hammer risk
- Stainless Steel impellers and diffusers for corrosion resistance
- Heavy duty cast suction and discharge brackets
- Heavy duty Stainless Steel structure for improved stiffness / permanent alignment of components (increased run time / trouble-free operation). Reinforced version with double welded rings for high pressure versions and for mix-flow models longer than 3 meters.
- Floating neck ring in PPS for higher resistance at temperature variations (models 14-19)
- Bushings is Aluminum Oxide for higher mechanical performance
- Bearings in EPDM, with drinking water certification approvals

STANDARD SPECIFICATION

- Models: VS 14-19-25-30-46-65
- Flow: up to 80 m³/h (50 Hz) / 100 m³/h (60 Hz)
- Head: up to 700 m (50 Hz / 60 Hz)
- Water temperature range:
Min. -5° C
Max. +90 °C (+60 °C for pumps with NBR parts)
- Maximum allowable amount of sand: 100 g/m³
- Vertical or horizontal operation

OPTIONS

- Higher-graded material: 316SS (N), 904L (R)
- Double cable guard
- Discharge heads:
Rp2"/Rp3" VS 14/19/25,
Rp4" VS 30/46-65
- Motor adapter: 6x4 and 6x8 for I and N versions



SUBMERSIBLE BOREHOLE PUMPS

VS8 SUBMERSIBLE PUMP

STAINLESS STEEL
304

OPTIONAL
STAINLESS STEEL
316

OPTIONAL
STAINLESS STEEL
904L



FEATURES & BENEFITS

- Designed to operate efficiently with Franklin Electric submersible motors / NEMA Standard motor adapter
- Built-in check valve and over size pump shaft
- Stainless Steel components for durability and robustness, assuring longevity and trouble-free operation
- Stainless Steel impellers and diffusers for corrosion resistance
- Thick solid Stainless Steel shell to maintain alignment
- Heavy duty cast suction and discharge brackets
- Motor adapter and discharge head may be removed without disturbing the impeller / diffuser stack
- Many design technical features make this pump range very compact and extremely reliable to ensure applications in the most complex and severe conditions.
- Easy maintenance without the need of special tools
- Bushings is Aluminum Oxide for higher mechanical performance
- Bearings in EPDM, with drinking water certification approvals

STANDARD SPECIFICATION

- Models: VS 78-97
- Flow: up to 120 m³/h (50 Hz) / up to 160 m³/h (60 Hz)
- Head: up to 500 m (50 Hz) / 524 m (60 Hz)
- Water temperature range: Min. -5° C, Max. +60 °C
- Maximum allowable amount of sand: 100 g/m³
- Vertical or horizontal operation

OPTIONS

- Higher-graded material: 316SS (N), 904L (R)
- Double cable guard
- Discharge head adapter: Rp4" or Rp6" for I and N version



VSC 8-10-12 SUBMERSIBLE PUMP

STAINLESS STEEL
304
CF8 / 304SS

OPTIONAL
STAINLESS STEEL
316
CF8M / 316SS

OPTIONAL
STAINLESS STEEL
DUPLEX



FEATURES & BENEFITS

- Robust, compact and reliable design
- The hydraulics are designed to enhance the overall efficiency thus reducing energy consumption and making the pumping systems more cost effective
- Built-in check valve to protect the pump against water hammer
- Cast Stainless Steel impellers and diffusers for high corrosion and abrasion resistance

STANDARD SPECIFICATION


- Models:
8": VSC 114 - 132 - 156
10": VSC 204 - 264 - 304
12": VSC 360 - 420 - 420A
- Flow:
8": up to 192 m³/h (50 Hz)
10": up to 348 m³/h (50 Hz)
12": up to 540 m³/h (50 Hz)
- Head:
8": up to 473 m (50 Hz)
10": up to 484 m (50 Hz)
12": up to 337 m (50 Hz)
- Maximum allowable amount of sand: 100 g/m³
- Water temperature range: from -5 °C to +60 °C
- Rotation: counter clockwise when looking into the discharge
- Operation in vertical or horizontal position



OPTIONS

- CF8M/316 & Duplex version
- Double cable guard
- Trimmed impellers




SUBMERSIBLE PRODUCTS

MULTISTAGE PUMPS

CLOSE-COUPLED 5" PUMPS

5" Stainless steel close-coupled submersible multistage pumps



FEATURES & BENEFITS

- Stainless steel impellers and diffusers for corrosion resistance
- Heavy duty over size motor shaft
- Stainless Steel water proof capsule for motor protection
- Motor cooling is guaranteed by the pumped liquid
- Double mechanical seal separated by an oil chamber for maximum motor protection
- Plug-in type power cable and level control (floater) for easy replacement

STANDARD SPECIFICATION

- Models: ES 3-5 / VN 3-5-9 / VL 3-5-9
- Single phase or three phase asynchronous motor
- Asynchronous technology
- Protection IP68, Insulation class: F
- Standard voltage:
 - Single-phase: 50 Hz: 220 - 240 V $\pm$ 5 %
60 Hz: 220 - 230 V $\pm$ 5 %
 - (Thermal protection built into the motor up to 1.1 kW and provided into the starter panel from 1.5 kW and above)
 - Three-phase: 50 Hz: 220 - 240 V $\pm$ 5 % and 380 - 415 V $\pm$ 5 %
60 Hz: 220 - 230 V $\pm$ 5 % or 380 - 400V $\pm$ 5 %
 - (Thermal protection to be provided into the starter panel by the installer)
- Frequency of starts: max. 60 starts/ hour (with min. 1 minutes resting time)

20 m cable

with open cable end

Built-in capacitor

Threaded delivery port

Compact close-coupled design

robust and corrosion resistant

Stainless Steel impellers and diffusers

for durability, superior efficiency and highest performances

Threaded suction port



ES

VN

VL

APPLICATIONS



Water Distribution
Pressure Boosting



Rainwater Recovering



Irrigation, Gardening,
Sprinklers



Wash down unit



slightly corrosive
liquids



Water supply to and from
tanks, reservoir and wells

CLOSE-COUPLED SUBMERSIBLE PUMPS

ES SUBMERSIBLE PUMP

- Flow: up to 7.5 m³/h (50 Hz) / 9 m³/h (60 Hz)
- Head: up to 88 m (50 Hz) / 80.5 m (60 Hz)
- Discharge outlet 1 1/4" Rp
- Maximum working pressure: 10 Bar
- Maximum immersion depth: 20 m
- Maximum allowable amount of sand: 50 g/m³
- Maximum solids size: up to 2 mm
- Liquid temperature range: -5 °C to + 40 °C
- Continuous operation either in vertical or horizontal position
- All single-phase models with integrated capacitor
- 20 m of power cable type H07RN-F is supplied with the standard version
- Single-phase version available without float switch



VN SUBMERSIBLE PUMP

- Flow: up to 14 m³/h (50 Hz) / 16 m³/h (60 Hz)
- Head: up to 104 m (50 Hz) / 115 m (60 Hz)
- Discharge outlet: 1 1/4" Rp
- Maximum working pressure: 12 Bar
- Maximum immersion depth: 20 m
- Maximum allowable amount of sand: 50 g/m³
- Maximum solid size: up to 2 mm
- Liquid temperature range: from -5 °C to +40 °C
- CB control box with integrated capacitor for single-phase version, available as option
- Continuous operating either in vertical or horizontal position
- Power cable: 20 m cable type H07RN-F is supplied with Standard version
- Single-phase version available without float switch



VL MULTISTAGE PUMP

- Flow: up to 14 m³/h (50 Hz) / 16 m³/h (60 Hz)
- Head: up to 104 m (50 Hz) / 115 m (60 Hz)
- Discharge outlet: 1 1/4" Rp
- Maximum working pressure: 15 Bar
- Maximum immersion depth: 20 m
- Maximum allowable amount of sand: 50 g/m³
- Liquid temperature range: from -5 °C to +40 °C
- Continuous operating either in vertical or horizontal position
- Power cable: 2 m cable type H07RN-F is supplied with Standard version
- Single-phase version available without float switch
- Rp threaded (inlet/outlet)





4"/6"/8"/10" HIGH EFFICIENCY SYSTEMS

Energy Savings up to 21 %* with the High Efficiency Submersible Borehole Systems

- Synchronous submersible NEMA motor (4"-8")
- Variable frequency drive
- Matching output filter**
- Flow switch (Solar systems)
- Matching submersible pumps available separately



FEATURES & BENEFITS

- Up to 21 % improved motor efficiency* with excellent partial load behaviour (SKU reduction)*
- Due to the high motor efficiency, amps are significantly reduced, which might lead to smaller drop lead cross size and thus cost saving
- One-stop shop and perfectly matching components guarantee first-class performance/efficiency
- Power factor corrected input (No power compensation needed)
- Significant lower motor heat rise (Increased lifetime)
- Easy system set-up due tailored pre-settings, user interface and own Franklin Electric software / App (4")
- Incorporated Soft start and protection features (increased lifetime, no additional investment)
- Speed control (Optimum aggregate operation - pump matches system any time)
- Communication ModBus (RS485 and Ethernet) 6"/8"

MOTOR RANGES

- 4":
1.1 / 2.2 / 3.0 / 4.0 / 5.5 / 7.5 kW (100 Hz - 3000 rpm)
1.2 / 2.5 / 3.4 / 4.6 kW (120 Hz - 3600 rpm)
- 6" (100 Hz - 3000rpm / 120 Hz - 3600 rpm):
4.0 - 11.0 kW
13.0 - 22.0 kW
26.0 - 45.0 kW
- 8": 75 / 100 / 150 kW (100 Hz - 3000 rpm / 120 Hz - 3600 rpm)
- 10": 200 / 250 kW (100 Hz - 3000 rpm),
200 / 290 kW (120 Hz - 3600 rpm)



To find the right system, please use the High Efficiency Systems payback Calculator on franklinwater.eu



4"

6"

8"

10"

4" HIGH EFFICIENCY SYSTEM

High Efficiency Submersible Borehole Systems with encapsulated Permanent magnet motors



STANDARD SPECIFICATION

- Motor range: 1.1 / 2.2 / 3.0 / 4.0 / 5.5 / 7.5 kW (100 Hz - 3000 rpm), 1.2 / 2.5 / 3.4 / 4.6 kW (120 Hz - 3600 rpm)
- System Power Supply: 380 V - 400 V $\pm$ 10 %
- Frequency: 50 Hz - 60 Hz $\pm$ 2 %
- Nominal ambient temperature: motor: 30 °C, electronics: 50 °C (> 40 °C with derating)
- Protection: motor: IP68, insulation class B
drive: IP66/65/21
filter: IP00
- Vertical and horizontal operation
- Factory-featured with Bluetooth 4.0 Connectivity
- Remote control and maintenance via Mobile App

PACKAGED DEAL



- 4" synchronous submersible encapsulated NEMA motor
- 4"/6" submersible pump
- Variable frequency drive
- Matching output filter (400 V), 230 V kits and Solar versions without additional output filter

OPTIONS

- Special Voltages
- Sinus Output filters in IP00 (400 V)
- Higher-graded material: 316SS
- VFD IP21 for 400 V systems
- Solar version



4" HIGH EFFICIENCY SOLAR SYSTEM

High Efficiency Submersible Borehole Systems with encapsulated Permanent magnet motors for Solar applications

FEATURES & BENEFITS

- One-stop shop and perfectly matching components guarantee first-class performance/efficiency
- Less panels, more water respectively
- Integrated voltage "boost" (up to 2.2 kW) significantly reduces number of solar panels
- MVPT algorithm maximises system output and reliability during time with less solar energy available.
- Solar controller can be powered by DC or AC supply at a time
- System Power Supply: $\leq$ 2,2 kW: 90 - 400 V DC / AC Backup: 90 - 265 V, $\geq$ 3,0 kW: 160 - 650 V DC / AC Backup: 190 - 520 V; > 4 kW: 380 - 500 V AC / 840 - 400 V DC
- Backup Power supply / Direct AC feeding to maximize system runtime
- Top class protection with Electronics in IP66 / 21

6" HIGH EFFICIENCY SYSTEM CT

High Efficiency Submersible Borehole Systems with encapsulated Permanent magnet motors



STANDARD SPECIFICATION

- Motor range:
4.0 – 11.0 kW / 13.0 – 22.0 kW / 26.0 – 45.0 kW
(100 Hz - 3000 rpm / 120 Hz - 3600 rpm)
- System Power Supply: 380 V - 400 V $\pm$ 10 %
- Frequency: 50 Hz $\pm$ 6 %
- Protection: motor: IP68, insulation class F
drive: IP66/54/21
filter: IP54/00

PACKAGED DEAL



- 6" synchronous submersible encapsulated 304SS NEMA motor
- Variable frequency drive
- Dv/dt output filter
- Flow switch (Solar systems)
- Matching submersible pumps available separately

OPTIONS

- Higher-graded materials: WW, 316SS
- Special voltages
- Retrofittable PT 100 temperature sensor
- Plug-in card PT100
- Plug-in card 6x DI/DO
- Plug-in card Profibus
- Plug-in card 1x AI & 2x AO



6" HIGH EFFICIENCY SOLAR SYSTEM CT

High Efficiency Submersible Borehole Systems with encapsulated Permanent magnet motors for Solar applications

FEATURES & BENEFITS

- Special MPP algorithm for centrifugal borehole pumps
- Top class protection with Electronics in IP66 (No cabinet- no cooling fan/dust filter- no maintenance), GORE® vent (No condensation)
- Direct DC feeding
- Less panels, more water respectively
- MVPT algorithm maximises system output and reliability during time with less solar energy available.
- System Power Supply: 400 - 800 V DC (min. starting voltage 440 V)
- Frequency: 30 - f_N (50 Hz respectively 60 Hz)

8" HIGH EFFICIENCY SYSTEM REW

High Efficiency Submersible Borehole Systems with rewindable Permanent magnet motors



STANDARD SPECIFICATION

- Motor range: 75 / 100 / 150 kW (100 Hz - 3000 rpm / 120 Hz - 3600 rpm)
- System Power Supply: 380 V - 400 V $\pm$ 10 %
- Frequency: 50 Hz $\pm$ 6 %

PACKAGED DEAL



- 8" synchronous submersible encapsulated WW NEMA motor
- Variable frequency drive
- Output filter

OPTIONS



- Special Voltages
- Higher-graded material: 316SS, 904L
- Retrofittable PT 100 temperature sensor
- Sinus output filters in IP54 and IP00, IP21 for Solar application
- Plug-in card 6x DI/DO (order no. 308 170 201)
- Plug-in card PT100 (order no. 308 170 202)
- Plug-in card 1x AI & 2x AO (order no. 308 170 206)
- Plug-in card Profibus (order no. 308 170 203)



8" HIGH EFFICIENCY SOLAR SYSTEM REW

High Efficiency Submersible Solar Borehole Systems with rewindable Permanent magnet motors for Solar applications

FEATURES & BENEFITS

- Special MPP algorithm for centrifugal borehole pumps
- Direct DC feeding
- Less panels, more water respectively
- Motor range: 37 - 150 kW
- System Power Supply: 400 - 800 V DC (min. starting voltage 440 V)
- Frequency: 30 - f_N (50 Hz respectively 60 Hz)

10" HIGH EFFICIENCY SYSTEM REW

High Efficiency Submersible Borehole Systems with rewindable Permanent magnet motors



STANDARD SPECIFICATION

- Motor range:
200 / 250 kW (100 Hz - 3000 rpm),
200 / 290 kW (120 Hz - 3600 rpm)
- System Power Supply: 400 V / 460 V $\pm$ 10 %
- Frequency: 50 Hz - 60 Hz $\pm$ 2 %
- Nominal ambient temperature: motor: 30 °C, electronics: 50 °C
(> 40 °C with derating)
- Protection: motor: IP68, insulation class Y
 drive: IP00
 filter: IP00
- Vertical operation; horizontal operation for 200 kW

PACKAGED DEAL



- 10" synchronous submersible rewindable WW motor
- Variable frequency drive
- Matching output filter
- Flow switch (Solar systems)
- Matching submersible VSC pump (available separately)

OPTIONS

- Special Voltages
- IP54 electronics
- Higher-graded material: 316SS, 904L
- Retrofittable PT 100 temperature sensor
- Sinus output filters
- Plug-in card 6x DI/DO
- Plug-in card PT100
- Plug-in card 1x AI & 2x AO
- Plug-in card Profibus




10" HIGH EFFICIENCY SOLAR SYSTEM REW

High Efficiency Submersible Solar Borehole Systems with rewindable Permanent magnet motors for Solar applications

FEATURES & BENEFITS

- Special MPP algorithm for centrifugal borehole pumps
- Top class protection with Electronics in IP68
- Less panels, more water respectively
- Direct DC feeding
- MVPT algorithm maximises system output and reliability during time with less solar energy available.
- Motor range: 150 - 250 kW (100 Hz - 3000 rpm)
and 200 - 390 HP (120 Hz - 3600 rpm)
- System Power Supply: 400-800 V (min. starting voltage 440 V)
- Frequency: 30 - f_N



VERTICAL MULTISTAGE CENTRIFUGAL PUMPS

Stainless Steel Multistage pumps for high efficiency and superior performance

Franklin Electric Vertical multistage pumps are the silent partner of your daily life. Available in different metallurgies (Cast Iron, 304 SS, 316 SS), head and flow, offer the right solution for any pressure boostin application.

Drinking water approvals



Cartridge mechanical seal

replaceable without disassemble the pump
(for models > 4 kW no need to disassemble the motor)

Tungsten carbide intermediate bearing

to stabilize the hydraulics with a large number of stages

Commercial motors

with interchangeable motor brackets

No up-thrust bearing

for models up to 4 kW

Replaceable floating neck ring

for cost effective maintenance and long-lasting performance

Stainless Steel impeller and diffuser

for corrosion resistance and increase of efficiency

Easy installation in-line ports

Round flange, oval, Victaulic, Clamp, Threaded



APPLICATIONS



Water Distribution
Pressure Boosting
Drinking water



Irrigation
Water treatment plants
Gardening, Sprinklers



Wash down unit
Boiler Feed



Domestic, industrial and
agricultural systems



Circulation of hot and
cold water for heating,
cooling, conditioning systems

VERTICAL MULTISTAGE PUMPS

EV SERIES - VERTICAL MULTISTAGE PUMPS



High performance Pressure-boosting for flows up to 115 m³/h (50 Hz), 140 m³/h (60 Hz)

FEATURES & BENEFITS

- Compact and solid structure
- All wetted parts in Stainless Steel
- Shaft bearing and journal sleeve made of tungsten carbide
- WRAS approved PPS (EV 1-3-6-10-15-20) PTFE (EV 30-45-65-95)
- Easily replaceable cartridge mechanical seal, no pump disassembly required; no motor disassembly required for models higher than 4 kW
- Reduced service and maintenance time thanks to the monobloc design of mechanical seal and the models up to 4 kW without thrust bearing
- Replaceable Stainless Steel wear ring in the neck of the impeller (EV 30-45-65-95)
- Tungsten carbide intermediate bearing to control and eliminate vibration and stabilize the rotor with a large number of stages
- Stainless Steel impeller and diffusers for corrosion resistance

PUMP SPECIFICATION

- Models: EV 1-3-6-10-15-20-30-45-65-95
- Flow: up to 115 m³/h (50 Hz) / 140 m³/h (60 Hz)
- Head: up to 326 m (50 Hz) / 282 m (60 Hz)
- Discharge and suction port: Oval, Round flanges, Victaulic and Clamp connections
- Liquid temperature range: from -15 °C to +120 °C
- Maximum working pressure: Oval flange 16 Bar; Round Flange, Victaulic and Clamp connections 25 bar
- Direction of rotation: clockwise looking at the pump from the top down
- Mechanical seal Type E1 (standard) = Graphite/Silicon carbide/ EPDM (EN 12756 ex DIN 24960) WRAS and ACS approved
- Mechanical seal Type BE1 (balanced) = Graphite/Silicon carbide/ EPDM WRAS and ACS approved (EV 30-45-65-95)

SPECIAL VERSION



- Special Voltages
- Passivated version
- High Pressure (HP) version
- Horizontal installation
- Further mechanical seal material

MOTOR SPECIFICATION

- Motor powers from 0.37 to 45 kW at 50 and 60 Hz
- Three-phase motor efficiency class IE3
- Motor size: B14 ≤ 4 kW, B5 ≥ 5.5 kW
- Protection: IP55, Insulation class: F
- Max ambient temperature: 40 °C
- Standard voltage:
 - 230/400 V ≤ 3 kW
 - 400/690 V ≥ 4 kW
- PTC sensor 155 °C: standard from 11 kW (on request from 0.75 to 7.5 kW)



VERTICAL MULTISTAGE PUMPS

EM SERIES - VERTICAL CLOSE-COUPLED MULTISTAGE PUMPS



Vertical multistage pumps for pressure boosting

FEATURES & BENEFITS

- Pumping of clear non-loaded fluids
- Compact close-coupled design, robust and corrosion resistant
- Excellent efficiency and performance
- Floating neck ring in PPS
- Heavy duty oversize motor shaft
- Impellers and diffusers in Stainless Steel for Maximum durability
- Easy maintenance
- Strong and leak-proof motor ball bearing fitted in the motor

PUMP SPECIFICATION

- Models: EM 3-5-9
- Flow: up to 14 m³/h (50 Hz) / 17 m³/h (60 Hz)
- Head: up to 104 m (50 and 60 Hz)
- Discharge and suction port: Threaded or oval connections
- Max. working pressure: 12 Bar
- Max. ambient temperature: 40 °C
- Liquid temperature range:
Min. - 15 °C;
Max.: + 90 °C for domestic use (uses covered by CEI EN Standard 60335-2-41), + 110 °C only for industrial use (uses other than those covered by CEI EN Standard 60335-2-41)
- Mechanical seal Type E0 = Carbon / Ceramic / EPDM

MOTOR SPECIFICATION

- Single-phase
- Three-phase motors efficiency class IE3
- Asynchronous, TEFC (Totally enclosed, fan-cooled)
- 2 pole
- Protection: IP55, Insulation class F

VERSIONS

- D: Inline threaded
- T: Inline oval
- R: 3 threaded ports
- WRAS (on request)



VERSION D



VERSION R



VERSION T

VERTICAL MULTISTAGE PUMPS



EM DTM SERIES - VERTICAL CLOSE-COUPLED MULTISTAGE PUMPS

Vertical close-coupled Multistage pumps with inverter Drive-Tech MINI

FEATURES & BENEFITS

- **Efficiency:** The Drive-Tech MINI achieves overall energy savings up to 40 % (compared to conventional speed control systems)
- **Simplicity:** The Drive-Tech MINI is mounted directly onto the connection box. It is already supplied with a 2.0 meter power cable and a 1.50 meter cable to connect with the pressure transducer.
- **Innovation:** The Drive-Tech MINI can be controlled manually by the board panel or via Bluetooth by the Franklin Smartphone App "FE Connect Drivetech" (Android and IOS), enabling you to set and monitor the system remotely, save working data and increase the pump performance.
- **Safety:** The integrated Class B (EN55011) input-filter prevents any type of disturbances in the domestic network to ensure a reliable use. The filter follows EMC Directives (electromagnetic compatibility).


PUMP SPECIFICATION

- Compact close-coupled design, robust and corrosion resistant / Superior efficiency and performances
- Floating neck ring in PPS
- Oversize motor shaft
- Strong motor rolling bearing fitted in the motor bracket
- Mechanical seal Type E0 = carbon/ceramic/EPDM
- Energy saving due to variable speed control
- Soft start and soft stop
- Extended system life and reliability
- Simplified installation on motor or wall
- Easy and fast commissioning thanks to initial configuration wizard
- Installation on humid and dusty environment made possible by IP55 (NEMA 4) protection degree
- High thermal and mechanical performance thanks to aluminum case and independent ventilation

DRIVE-TECH MINI SPECIFICATION


- Advanced Functionalities:
 - Monitoring and programming with smartphone and FE Connect App, available for Android and iOS mobile devices
 - Remote control using a smartphone nearby as a modem
 - Copy and paste of programming recipes
 - Ability to send reports via email
 - Multilingual support
- Control modes:
 - Constant pressure control
 - Constant or proportional differential pressure control
 - Constant temperature control
 - Constant differential temperature control
 - Constant flow control
 - External frequency control (trimmer) or 1 or 2 preset frequencies control
- Built-in protection against:
 - Overvoltage and undervoltage
 - Overcurrent and no load
 - Dry running
 - Overtemperature
- EMC compatibility for residential environment:
 - Integrated PFC (P.F. 1) to meet EN61000-3-2
 - Integrated input filter for Category C1 (EN61800-3), Class B (EN55011)
- Multi-pump operation (COMBO):
 - Up to 8 units
 - Working alternation for uniform pumps wearing
 - Master or slave replacement in case of failure to ensure continuity of operation
- Advanced motor controls:
 - Next generation control of asynchronous motors
 - Sensorless control of permanent magnet synchronous motors
- Inputs and outputs:
 - 2 programmable digital inputs for motor start & stop
 - Modbus RTU
 - 2 output relays for alarm and run indication
 - 2 analog inputs 4-20 mA
 - 2 analog inputs 0-10 V





BOOSTING SYSTEMS

High performance Pressure-boosting system, made by series of pumps

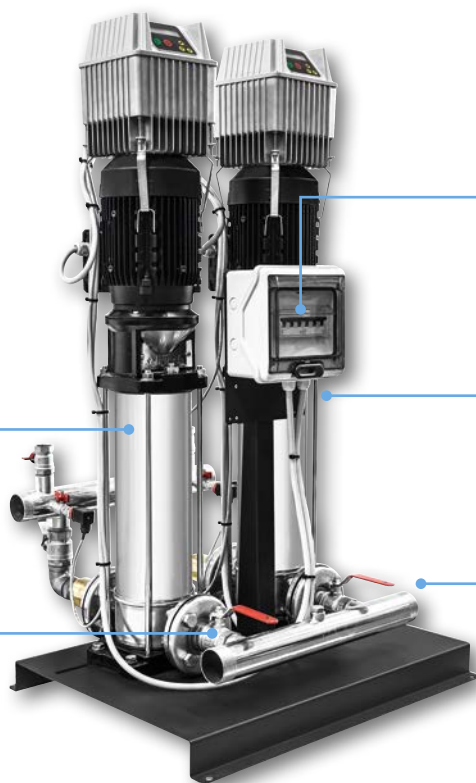

Compact design

Series of pumps connected in parallel

through manifolds, shut-off valves, check valves and fixed on a skid

Control panel and Pressure switch

All pumps are set and controlled by a control panel and pressure switch (fixed speed) or by inverter, one for each pump, for variable speed.

Easy handling

All booster set are hydraulically and electrically tested and assembled in the factory

Suitable for various applications



Domestic, industrial systems



Water Distribution Pressure Boosting



Irrigation Gardening, Sprinklers



Rainwater Recovering



Industrial plants Wash down units



Industrial cooling HVAC systems

PUMP SPECIFICATION

- Models: GP02/EH, GP02/EM, GP02/EV, GP03/EV, GD02 DTm, GD02 / EM, GD02/EV, GD03/EV
- Flow: up to 84 m³/h / Head: up to 160 m
- Start-up: direct or with inverter
- Power supply voltage: 1 x 230 V 50 Hz for single-phase sets, 3 x 400 V 50 Hz for three-phase sets
- Ambient temperature at nominal load: max 40 °C
- Relative humidity: max 50% at 40 °C
- Max. altitude at nominal load: 1000 m asl
- Temperature of pumped liquid: clean water: 5 °C to +35 °C

VERSIONS

- Fixed speed
- Variable speed
- 304SS manifolds




GP SERIES

- GP series booster pump sets consist of two or three identical electric pumps coupled in parallel by manifolds, shut-off valves, check valves and fixed on a single base.
- The electric pumps are controlled via an electronic or electro-mechanical panel which automatically starts and stops the electric pumps based on the pressures set on the pressure switches.

GD SERIES

- Variable speed booster pump sets with Drive-Tech and Drive - Tech MINI inverter.
- GD series booster pump sets consist of two or three identical electrical pumps coupled in parallel by manifolds, shut-off valves, check valves and fixed on a single base.
- The electric pumps are controlled by inverter, one per electric pump, which modulates the operating frequency in order to maintain the set reading constant.



HORIZONTAL MULTISTAGE PUMPS

Stainless Steel Multistage pumps for high performance in numerous application

The Horizontal Multistage booster pumps are designed to meet the pressure boosting needs with flows up to 29 m³/h and heads up to 104 m. They are available with self-priming functionality or connected inverter drive for Maximum efficiency, simplicity, innovation and safety.



Drinking water approvals

Stainless Steel Impellers and Diffusers

Superior efficiency and performances

Floating neck ring in PPS

Reinforced design with tie rods

Compact close-coupled design Robust and corrosion resistant

Heavy duty oversize motor shaft

Flexible application base plate

Self-Priming functionality (sp versions)

Special elastic valve allows air to escape

During the start this elastic valve, which is located at the first stage, opens to allow air to escape out of the system and water to enter the pump. As soon as the pressure arrives at a certain point, the valve closes, and the pump reaches the required performance.

Drive-Tech MINI inverter

for Maximum efficiency, simplicity, innovation and safety

Asynchronous motors (3~)

TEFC (totally enclosed, fan-cooled)

APPLICATIONS



Water Distribution Pressure Boosting



Circulation of hot+cold water for heating, cooling, conditioning systems



Irrigation Gardening, Sprinklers



Wash down unit



Domestic, industrial and agricultural systems

HORIZONTAL MULTISTAGE PUMPS

EH/EHsp SERIES - HORIZONTAL MULTISTAGE AND SELF-PRIMING PUMPS

High performance Pressure-boosting in different flow rates, HP ratings and phases



FEATURES & BENEFITS

- The EH-Ehsp series is offered in five flow rates and different horsepower sizes, in single-phase or three-phase, to make sure you have the right pump to fit your application.
- Compact close-coupled design, robust and corrosion resistant
- Excellent efficiency and performance
- Floating neck ring in PPS
- Heavy duty oversize motor shaft
- Impellers and diffusers are made in Stainless Steel
- Easy maintenance
- Strong and leak-proof motor ball bearing fitted in the motor
- Pumping of clear non-loaded fluids

PUMP SPECIFICATION

- Models: EH 3-5-9-15-20 / EHsp 3-5
- Mechanical seal Type E0 = Carbon / Ceramic / EPDM: EH 3-5-9, EHsp 3-5
- Mechanical seal Type E1 = Seal carbon / Silicon carbide / EPDM: EH 15-20
- Flow: up to 29 m³/h (EH), up to 8 m³/h (EHsp) at 50 Hz
up to 30 m³/h (EH), up to 8.5 m³/h (EHsp) at 60 Hz
- Head: up to 104 m (EH and EHsp) at 50 Hz
up to 111 m (EH), up to 77 m (EHsp) at 60 Hz
- Connections: Rp threaded for inlet and outlet
- Max. working pressure: 10 Bar
- Max. ambient temperature: 40 °C
- Liquid temperature range (EH):
Min. from -15 °C to -10 °C according to gasket material
Max. +55 °C single-phase models for domestic use (uses covered by CEI EN Standard 60335-2-41)
+90 °C three-phase models for domestic use (uses covered by CEI EN Standard 60335-2-41)
+110 °C only for industrial use (uses other than those covered by CEI EN Standard 60335-2-41)
- Liquid temperature range (EHsp): from 0 °C up to 35 °C

MOTOR SPECIFICATION

- Single-phase
- Three-phase motor efficiency class IE3
- Asynchronous, TEFC (Totally Enclosed, fan-cooled)
- 2 pole
- Protection IP55, Insulation class: F
- Standard voltage:
220-240 V / 380-415 V ±5 % up to 3 kW
(Thermal protection to be provided into the starter panel by the installer)
380-415 V / 660-690 V ±5 % from 4 kW
(Thermal protection to be provided into the starter panel by the installer)



HORIZONTAL MULTISTAGE PUMPS

EH DTM SERIES - HORIZONTAL MULTISTAGE WITH DRIVE-TECH MINI



State-of-the-art booster set with inverter which combines superior efficiency, simplicity, innovation and safety

FEATURES & BENEFITS

- **Efficiency:** The Drive-Tech MINI achieves overall energy savings up to 40 % (compared to conventional speed control systems)
- **Simplicity:** The Drive-Tech MINI is mounted directly onto the motor control box. It is already supplied with a 2.0 meter power cable and a 1.50 meter cable to connect with the pressure transducer.
- **Innovation:** The Drive-Tech MINI can be controlled manually by the board panel or via Bluetooth by the Franklin Smartphone App "FE Connect Drivetechn" (Android and IOS), enabling you to set and monitor the system remotely, save working data and increase the pump performance.
- **Safety:** The integrated Class B (EN55011) input-filter prevents any type of disturbances in the domestic network to ensure a reliable use. The filter follows EMC Directives (electromagnetic compatibility).
- Compact close-coupled design, robust and corrosion resistant, Stainless Steel impellers and diffusers for long durability
- Flexible application base plate
- Floating neck ring in PPS
- Oversize motor shaft
- Easy maintenance
- Strong motor rolling bearing fitted in the motor bracket
- Mechanical seal Type E0 = carbon/ceramic/EPDM
- Energy saving due to variable speed control, Soft start and soft stop
- Simplified installation on motor or wall, Easy and fast commissioning thanks to initial configuration wizard
- Installation on humid and dusty environment made possible by IP55 (NEMA 4) protection degree
- High thermal and mechanical performance thanks to aluminum case and independent ventilation

PUMP SPECIFICATION

- Flow: up to 17 m³/h
- Head: up to 99 m
- Connections: Rp threaded for inlet and outlet
- Maximum working pressure: 10 Bar
- Maximum altitude at rated current: 1000 m
- Maximum ambient temperature: 40 °C
- Liquid temperature range:
- Minimum: from 0 °C according to gasket material
- Maximum: +80 °C for domestic use (uses covered by CEI EN standard 60335-2-41)



DRIVE-TECH MINI SPECIFICATION

- Monitoring and programming with smartphone and FE Connect App, available for Android and iOS mobile devices
- Remote control using a smartphone nearby as a modem
- Copy and paste of programming recipes
- Ability to send reports via email
- Control modes: Constant pressure control, Constant or proportional differential pressure control, Constant temperature control, Constant differential temperature control, Constant flow control, External frequency control (trimmer) or 1 or 2 preset frequencies control
- Built-in protection against: Overvoltage and undervoltage, Overcurrent and no load, Dry running, Overtemperature,
- EMC compatibility for residential environment: Integrated PFC (P.F. 1) to meet EN61000-3-2, Integrated input filter for Category C1 (EN61800-3), Class B (EN55011),
- Multi-pump operation (COMBO): Up to 8 units, Working alternation for uniform pumps wearing, Master or slave replacement in case of failure to ensure continuity of operation
- Advanced motor controls: Next generation control of asynchronous motors, Sensorless control of permanent magnet synchronous motors
- Inputs and outputs: 2 programmable digital inputs for motor start & stop, Modbus RTU, 2 output relays for alarm and run indication, 2 analog inputs 4-20 mA, 2 analog inputs 0-10 V

DRAINAGE PUMPS

Great range of submersible drainage and sewage pumps for domestic and industrial waste water application



EGN DRAINAGE PUMP

- Models: EGN 4-5-7-9-11-15
- Cast iron pump casing and impeller with epoxy cataphoresis treatment
- Impeller: open impeller
- Vertical delivery port
- Single-phase version, 230 V: with float switch and incorporated capacitor, 10 m cable with Schuko plug
- Three-phase version, 230/400 V: 10 m cable without plug
- Double mechanical seal in oil chamber
- Flow: up to 30 m³/h at 50 Hz
- Head: up to 20 m at 50 Hz
- Liquid temperature: up to 35 °C
- Motor power: up to 1.5 kW at 50 Hz
- Max. immersion depth: 5 m
- Max. solid content: 10 mm



APPLICATIONS



For clean water containing solids up to 10 mm grain size



For draining rooms or emptying tanks



Extraction of water from ponds, streams or pits and for rainwater collection

ED - EDV DRAINAGE PUMP

- Models: ED 5-9 (with two-passage impeller)
EDV 5-7-9 (with free-flow Vortex impeller)
- Stainless steel pump casing and impeller
- Vertical delivery port
- Double mechanical seal in oil chamber
- Single-phase version, 230 V: with float switch and incorporated capacitor, 10 m cable with Schuko plug
- Three-phase version, 230/400 V: 10 m cable without plug
- Flow: up to 26 m³/h at 50 Hz
- Head: up to 13 m at 50 Hz
- Liquid temperature: up to 35 °C
- Motor power: up to 0.9 kW at 50 Hz
- Max. immersion depth: 5 m
- Max. solid content: 35 mm



APPLICATIONS



For clean and dirty water, containing solids up to 35 mm grain size



The free-flow impeller construction (EDV) is particularly suitable for liquids with an high solid content or with filamentous particles



The construction with smooth surfaces in rolled-stainless steel and easy access for cleaning is suitable for certain uses in the food industry

DRAINAGE PUMPS

EGT - EGF DRAINAGE PUMP

- Models: EGT/EGF 5-7-9-11-15
- Free-flow (Vortex) impeller construction
- EGT: Vertical delivery port, EGF: with horizontal flanged and threaded delivery port
- Cast iron pump casing and impeller with epoxy cataphoresis treatment
- Single-phase version, 230 V: with float switch, thermal protector and incorporated capacitor, 10 m cable
- Three-phase version, 230/400 V: 10 m cable without plug
- Double mechanical seal in oil chamber
- Flow: up to 36 m³/h at 50 Hz
- Head: up to 14.4 m³/h at 50 Hz
- Liquid temperature: up to 35 °C
- Motor power: up to 1.5 kW at 50 Hz
- Max. immersion depth: 5 m
- Max. solid content: 50 mm



APPLICATIONS




Domestic or industrial waste water, dirty water containing solids up to 50 mm grain size, for liquids which are compatible with the pump materials



For draining rooms or emptying tanks



Extraction of water from ponds, streams or pits and for rainwater collection



END-SUCTION CENTRIFUGAL PUMPS

Cast iron pumps according to EN 733



The FN series is using cutting edge technology in terms of quality and efficiency. The End suction centrifugal electric pumps are designed to pump clean liquids, without abrasives and suspended solids, non -explosive environments.

Motors

The motors are available according to the highest standard of efficiency. The product is available in numerous configurations in terms of compatibility of pumped liquids.

Impeller with cataphoresis coating


for corrosion resistance

Standard Reference

ErP 547/2012 (MEI > 0.4)
640/2009 (Motors efficiency class IE3
UNI EN 733 (DIN 24255)

High Temperature liquids

Maximum liquid temperature:
up to 90 °C for domestic use
up to 120 °C for industrial use

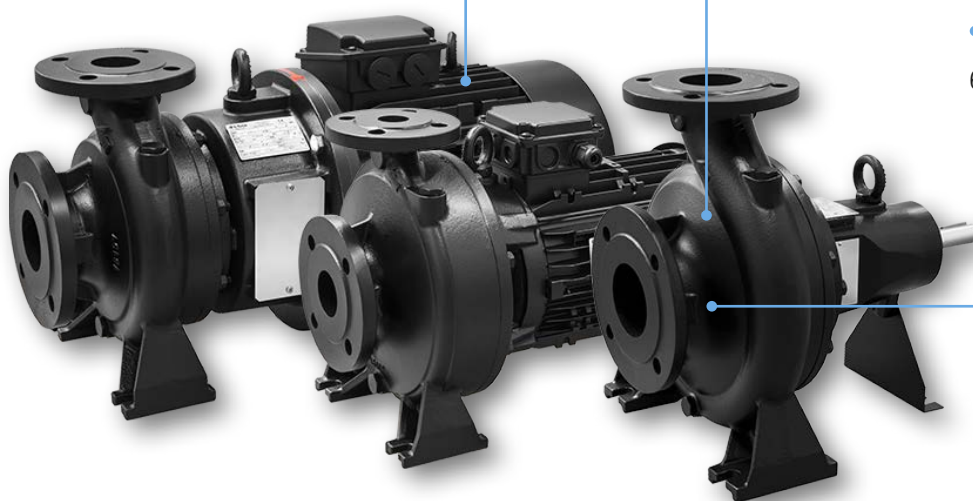

APPLICATIONS



Water distribution, Water treatment, Water supply



Irrigation, Water treatment



Industrial plants

OPTIONS

- FNEM: version with motor, coupling and base (on request)



FNE - BARE SHAFT PUMPS

FEATURES & BENEFITS

- Version without motor, suitable to be coupled with a Standard electric motor.
- Pump body / Mechanical seal housing / Motor bracket: Cast-iron GG20 with anti-corrosive coating
- Suction/delivery ports: according to standard EN1092-2
- Impeller: Cast-iron GG20 with cataphoresis coating
- Pump shaft: Stainless steel AISI 304

MOTOR SPECIFICATION

- Mechanical seal Type P0: Carbon / Ceramic / NBR
- Models: FNE 32-40-50-65-80
- Flow: up to 240 m³/h at 50 Hz
- Head: up to 100 m at 50 Hz



END-SUCTION CENTRIFUGAL PUMPS

FNC - EXTENDED SHAFT PUMPS



FEATURES & BENEFITS

- Close-coupled pumps with extended shaft motor.
- Models: FNC 32-40-50-65-80
- Pump body / Mechanical seal housing / Motor bracket: Cast-iron GG20 with anti-corrosive coating
- Suction/delivery ports: according to Standard EN1092-2
- Impeller: Cast-iron GG20 with cataphoresis coating
- Pump shaft: Stainless Steel AISI 304
- Mechanical seal Type P0: Carbon / Ceramic / NBR
- Flow: up to 180 m³/h at 50 Hz
- Head: up to 90 m at 50 Hz
- Maximum working pressure: PN10

MOTOR SPECIFICATION

- Asynchronous squirrel cage-type motor
- External ventilation
- Incorporated motor protection and capacitor integrated for single-phase motors
- Motor protection for 3- motors must be installed by the customer (equipment compliant with current standards recommended)
- Efficiency class: IE3
- Protection IP54, Insulation class: F



FNS - STUB SHAFT PUMPS



FEATURES & BENEFITS

- Models: FNS 32-40-50-65-80
- Rigid-coupled with a bracket, an adapter and a rigid coupling keyed to the Standard motor shaft extension.
- Pump body / Mechanical seal housing / Motor bracket: Cast-iron GG20 with anti-corrosive coating
- Suction/delivery ports: according to Standard EN1092-2
- Impeller: Cast-iron GG20 with cataphoresis coating
- Pump shaft: Stainless Steel AISI 304
- Mechanical seal Type P0: Carbon / Ceramic / NBR
- Flow: up to 240 m³/h at 50 Hz
- Head: up to 100 m at 50 Hz
- Maximum working pressure: PN10

MOTOR SPECIFICATION

- Asynchronous squirrel cage-type motor
- External ventilation
- Motor protection for 3- motors must be installed by the customer (equipment compliant with current standards recommended)
- Efficiency class: IE3
- Protection IP55, Insulation class: F
- Service class: S1



CONSTANT PRESSURE SYSTEM

SUBDRIVE CONNECT



Constant-pressure system through variable speed control of submersible pumps

- Optimization of system performance and water pressure supply
- Built-in diagnostics and protection
- Easy commissioning by plug and play system
- Input Voltage: 230V AC
- Wi-Fi connection for use with the FE Connect mobile application for advanced settings and monitoring
- Constant water pressure with a wide range of settings (0.5 to 9.5 bar)
- User-defined motor frequency range and set-up
- Easy-to-read LCD display for system pressure and fault identification
- Built-in duplex alternator for dual drive operation
- Proven components for long-term reliability
- Backwards compatibility and easy installation
- Single-phase 3-wire motor operation (60 Hz)
- Advanced motor soft-start feature increases motor life
- CE, cULus and UL approved

OPTIONS

- Moisture Sensor – Weet floor identification
- 4-20 mA analog pressure transducer – 6, 10, 16 bar
- Outdoor rated cable kit for analog pressure transducer
- Communication cable kit for built-in duplex alternator
- Replacement Kit for Input and Display Board
- Input and Output Filter
- Lightning Arrestor
- Fan Replacement Kit
- Standard SubDrive Pressure Switch
- Spare part kits for electronic controller and motor



VARIABLE FREQUENCY DRIVES (VFD)

First class performance and control with Variable Frequency Drives for submersible pumping systems, water booster sets and HVAC systems with circulating pumps

FEATURES & BENEFITS

- Energy saving due to variable speed control
- Soft start and soft stop
- Extended system life and reliability
- Simplified installation on motor or wall
- Easy and fast commissioning due to initial configuration wizard
- High thermal and mechanical performance thanks to aluminum case and independent ventilation
- Advanced user experience with App FE Connect Drive-Tech

Power Supply	Input Voltage U_{IN}	90 - 265 V / 190 - 520 V
		90 - 400 V DC / 160 - 650 V DC
	Input frequency f_{IN}	50 - 60 Hz (+/- 2%)
	Starts per hour	20; with min. 3 min rest period
Motor connection	Output voltage	0 - U_N
	Output current	I_N at rated ambient temperature -10 - 50 °C
	Output frequency	0 - f_N resolution 0.01 Hz
Enclosure	Protection Degree	IP 66 / 65
Control characteristics	Switching frequency	2 - 8 kHz, default setting 4 kHz
Ambient conditions	Operation temperature	-10 - 50 °C
	Storage temperature	-30 - 70 °C
	Altitude	Max. altitude at rated current: 3000 m (> 1000 m with derating)
EMC	Immunity & Emissions	Complies with EN61800-3, Category C2 - first and second environment
Communication	RS 485	Standard: ModBus RTU
	Bluetooth	SMART (4.0) for monitoring and programming
I/O connections	Digital Input	4 x
	Analog Input	4 x (2 x 4-20 mA / 2 x 0-10 V DC)
	Digital Output	2 x

DRIVE-TECH

- Reduced energy consumption / cost saving
- Longer life of pumping system
- Greater reliability of the complete unit
- Compact design, compatible with most pumps on the market
- Steady operation conditions in terms of pressure, flow and temperature.
- Motor protection and monitoring:
 - Overload and dry running protection
 - Integrated soft start and soft stop functions, extending the life of the system and reducing peak variation
 - Input current and supply voltage
 - Recording running hours and login errors and alarms reported by the system
 - Control of a second or third pump at constant speed DOL
 - Connection to other DriveE-Tech to get combined operation
- Enclosure is entirely made of die-cast aluminum and is very sturdy, lightweight, easy to cool down and very compact in size.
- Top class protection IP66/65 enclosure class (installations in humid and dusty places possible)
- Easy operation due to display placed on top and buzzer in case of alarm
- Optimized for submersible permanent magnet motor feeding



VARIABLE FREQUENCY DRIVES (VFD)

DRIVE-TECH MINI

- Remote control via Bluetooth and Mobile App
- Top class protection IP66/65 enclosure class (installations in humid and dusty places possible)
- Multiple control modes
- Built-in protection against dry run
- EMC compatibility for residential environment (category C1)
- Possibility to create booster stets up to 8 pumps
- Advanced motor controls
- Suitable to use with permanent magnet motors
- Analog inputs and outputs



DRIVE-TECH MINI SOLAR

- MPPT control maximizes efficiency of input power
- Powered by DC solar array
- Built in diagnostics and protection features
- Soft-start feature prevents water hammer and increases system life
- Control of AC induction and permanent magnet synchronous motors
- Robust IP55 minimizes impact of wildlife, insects, dust and weather

PROTECTION / CONTROL

SUBMONITOR MOTOR PROTECTION

State-of-the-art 3-phase pump protection to sense overheating straight from the motor windings



- Protection of 3-phase pumps with ratings between 3 and 200 hp, for motors with service factor amp ratings between 3 and 359 Amps
- Current, voltage and motor temperature are monitored using three integrated current transformers.
- Input Voltage: 190 - 600 VAC
- Digital display provides current and voltage readings for all three legs at the same time, and allows the user to set up the SubMonitor quickly and easily. Fault messages are easy to understand.
- Quick Setup guide for monitoring (simply entering line frequency (Hz), line voltage (Volt), and Motor Service Factor Amp rating)
- Monitors - Under/Overload; Under/Overvoltage; Current Unbalance; Overheated Motor (Subtrol Equipped); False Start (Chattering); Phase Reversal
- No need to make add. turns around the CT or add external CTs
- Password Protection Option
- DIN Rail Mounting Option
- Stores fault, setting changes, and pump run-time can be accessed through the display
- Lightning protection included in the Premium Package
- Detachable NEMA 3R display unit can be mounted on panel door
- UL 508 listed



SUBSTART SC

Single-phase Submersible Motor Starter



- The SubStartSC range covers all PSC motors from 0.25 kW to 2.2 kW for all voltages.
- Ergonomic design
- Easy installation / Wall mounting
- IP54 protection
- Voltage Tolerance: 220 - 240 V; -6 / +10 %; 50 Hz single phase
- Reliable protection features
- Attention to detail – every aspect engineered for the application
- The device is 100 % compatible with the motor characteristics
- Integrated thermal circuit breaker
- High-quality motor run capacitor for long-life endurance
- Terminal board suitable for ease of reliable connections



SUBSTART 3P

3-phase Submersible Motor Starter



- The SubStart3P® range covers all 3 phase motors from 0.37 kW to 7.5 kW.
- Ergonomic design
- Easy installation / Wall mounting
- IP54 protection
- Voltage Tolerance: 380 V -10 % / 415 V +6%
- Attention to detail – every aspect engineered for the application
- The device is 100% compatible with the motor characteristics
- Circuit breaker integrated thermal and magnetic overload protection
- Powered auxiliary contactor for use with external switches



PROTECTION / CONTROL

SUBTRONIC SC

Single-phase Submersible Motor Protection for PSC motors from 0.25 - 2.2 kW

- The SubTronicSC range covers all PSC motors from 0.25 kW to 2.2 kW for all voltages.
- Ergonomic design
- Easy installation / Wall mounting
- IP54 protection
- Voltage: 220 - 240 V; $\pm 10\%$; 50 Hz single phase
- Attention to detail – every aspect engineered for the application
- The device is 100 % compatible with the motor characteristics
- Intelligent Protection features:
 - Dry-run detection
 - Dry-run auto-reset
 - Over & Under voltage
 - Over current protection
 - Faulty Start Protection
 - Rapid Cycle Protection



SUBTRONIC 3P

3-phase submersible motor Protection for 3~ motors from 0.37 - 7.5 kW

- Wide range of operation: Compatibility with motor design allows a wide range of operation resulting in minimized nuisance tripping.
- Ergonomic design
- Easy installation / Wall mounting
- IP54 protection
- Voltage Tolerance: 380 V -10 % / 415 V +6 %
- Reliable protection, Sophisticated system management and peace of mind
- Attention to detail – every aspect engineered for the application
- Intelligent Protection features:
 - Dry-run detection
 - Dry-run auto-reset
 - Over & Under voltage
 - Over current protection
 - Rapid Cycle Protection



PRESS-TECH / PRESS-TECH S

Pump protection and control

- Fixed Starting pressure
- Power voltage:
 - Press-Tech: 1 x 115 Vac - 230 Vac $\pm 10\%$
 - Press-Tech S: 1 x 230 Vac $\pm 10\%$
- Frequencies: 50 Hz / 60 Hz
- IP65 Protection
- Maximum working pressure: 12 bar
- Maximum working temperature: 65 °C



PROTECTION / CONTROL

COV-BOX M SERIES

Control box for the price-competitive protection from overload

- Ratings: 0.37 kW (0.5 HP) up to 2.2 kW (3.0 HP)
- IP50 Protection
- Run capacitor
- Thermal overload circuit brake with manual reset
- Connection terminal board
- Wiring diagram
- Switch ON-OFF



QC-AV/E SERIES

Single-phase control box for the overall protection / starting assistance

- Ratings: 0.37 kW (0.5 HP) up to 2.2 kW (3.0 HP)
- IP50 Protection
- Electronic start capacitor / disconnecting run capacitor
- starting assistance under low voltage or voltage drops
- Thermal overload circuit brake with manual reset
- Terminal board connections
- Wiring diagram



QC-AV SERIES

Single-phase control box for the overall protection / starting assistance / voltmetric relay

- Ratings: 3.0 kW (4.0 HP) up to 4.0 kW (5.5 HP)
- IP50 Protection
- Start electrolytic capacitor / disconnecting relay / potential relay / run capacitor
- Thermal overload circuit brake with manual reset
- Connection terminal board
- Wiring diagram
- Pilot lamp / Switch ON-OFF



COV-BOX T SERIES

Three-phase control box for the overall protection

- Ratings: 0.37 kW (0.50 HP) up to 7.5 kW (10 HP)
- Metal zinc coated plate for grounding
- General isolating switch with locking door
- Line counter with thermal relay, adjustable scale and internal set
- Protection cutout (fuses) for motor and auxiliary circuits
- Green lamp indicating motor running
- Floating switch connection (optional) on switchboard
- Wiring diagram
- Pilot lamp / Switch ON-OFF



ACCESSORIES

CORROSION PROTECTION 4"

- For use in more aggressive media
- Mounting on the bottom of the motors
- Material: GG 25

System of operation: Wells with extremely high levels of chlorides and other elements combined with high temperatures will attack almost any type of metal, including stainless steel. When in contact with a more noble metal, the less noble metal becomes the anode of a galvanic cell. Oxidation occurs at the anode. It slowly dissolves (sacrificial anode), leaving the more noble metal unaffected. The result is a longer service life of the motor/pump unit in more aggressive media.



4000N



6500N



COOLING SHROUD 4"/6"/8"/10"/12"

- The cooling jacket is the ideal solution for vertical and horizontal installations of submersible motor pumps in rainwater cisterns and deep wells to ensure the cooling flow along the motor.
- It guarantees sufficient cooling of the motor.
- It is supplied with a filter that prevents leaves or small stones from being sucked in.



MOTOR/PUMP-COUPPLINGS

- Line of motor-pump couplings for maximum customer convenience for matching the Franklin motor to a variety of pump shafts.
- Couplings are designed to transmit the pump thrust to the motor in order to provide maximum benefits from the Franklin internal thrust bearing construction.
- Hardened stainless steel spacer discs in the 4" and 6" couplings assure positive bearing between motor and pump shafts and assure full support for downward thrust created by the pump.
- 8" couplings DO NOT contain hardened spacer discs, since the motor shaft itself is hardened.



DC DISCONNECT

- To disconnect the drive even under load safely from the solar generator, Franklin Electric offers suitable DC disconnect switches for different power ratings.



ACCESSORIES




DOUBLE PLUG LEAD FOR TERMINATION KIT

Required for use of lead termination kit. Connected between termination kit and 4" motor.

- Max. current 18 Ampere in air at max. 50 °C ambient temperature
- Max. current 23 Ampere submersed in water at max. 30 °C ambient temperature
- Max. Voltage: 750 V AC
- PSC / 2-wire / 3-wire motors and 3 - motors
- Optional strain relief
- KTW approval



FILLING LIQUID

Description	FES92	FES91	FES93
5 l motor filling liquid FES92			

motor type	required motor filling
4" encapsulated motor	FES93
6" encapsulated Standard / PM motor	FES91
6" encapsulated High Temp 90 °C motor	FES92

motor type	required motor filling
8" encapsulated Standard motor	FES91
8" encapsulated High Temp 75 °C motor	FES92
6"/8"/10"/12" rewindable Standard / PM motor	FES93

FLOAT SWITCH


- A float switch is a device used to detect the level of liquid within a tank.
- Required part for some High Efficiency Solar Systems



ACCESSORIES

FLOW PADDLE SWITCH

- The flow switch utilizes the force of liquid flow to propel its paddle and to detect the incoming flow or movement of the existing liquid in the pipe.
- Required part for some High Efficiency Solar Systems

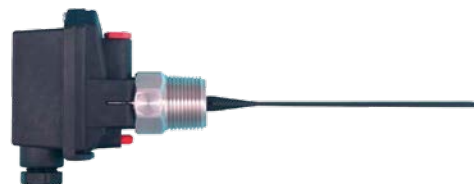

INLINE FLOW SWITCH

- The Inline Flow Switch operates magnetically. The piston within the switch body should be a free fit and spring back to its off position as soon as flow stops. For flow rates up to 4 m³/h; Connection: G1"



MOTOR FILLING KIT

- This kit contains all necessary tools to check and replenish Franklin Electric submersible motors with FES91, FES92 or FES93 filling liquid.



PERMANENT STAR PLUG 6"

- For specific applications it is necessary to permanently run a star-delta submersible motor in star connection. This may be achieved by using the *PERMANENT-STAR-PLUG*.
- This connector short-circuits all three pins in one of the two motor sockets and is designed to replace one lead.



ACCESSORIES

PRESSURE SWITCH SUBDRIVE - CONSTANT-PRESSURE CONTROLLER

1. The pressure switch signals continuously prevailing in the water supply system pressure to the SubDrive controller.
2. The factory setting of the desired pressure is 3,4 bar; however, they can be changed.



PT100 SENSOR FOR 6" AND 8" ENCAPSULATED MOTORS

- The PT100 is a precision platinum wire resistor that is specified occasionally as a temperature input for process control equipment. A jacketed control lead must be run from the PT100 lead to the above-ground equipment. The above-ground equipment is not available from Franklin Electric and is typically part of a custom panel or data acquisition system.
- PT100 sensor retrofit kits from Franklin Electric come with complete instructions and allow an easy field installation.

Standard motors:



HighTemp motors:




PT100 SENSOR FOR REWINDABLE MOTORS

- Fitted into the upper end bell flange
- PT100 sensor can be retrofitted with rewindable 6", 8", 10" and 12" motors
- Measurement of the temperature of the filling liquid
- Conductor with a resistance proportional to the temperature
- Allows continuous monitoring of the temperature
- PT100 sensor retrofit kits from Franklin Electric come with complete instructions and allow an easy field installation.
- The PT100 sensor is not a motor overload protection, so the warranty does not expire if a separate motor protection is installed (as required in the installation instructions).



PTC LEAD


- 4 - 30 m
- $\varnothing = 2 \times 0,75 \text{ mm}^2$
- $D = 7,0 \text{ mm}$

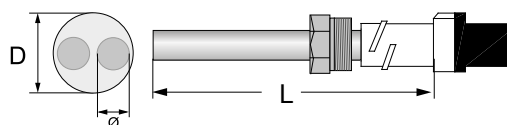

ACCESSORIES

PUMP CONNECTION SCREW KITS

- pump connection screw kits for 6" / 8" encapsulated motors and 8"/10"/12" rewindable motors

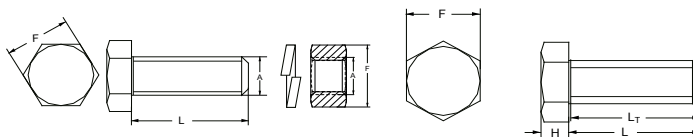

SPLICING KIT 1,5 - 95 MM²

- Connection kits for cable extensions with cable connection sleeves for cable cross-sections up to 95 mm².
- Suitable for all common cable materials
- Long durability
- High electrical insulation values and mechanical strength
- Quick and easy assembly
- Components: Transparent plastic shell, Ready-to-mix cast resin, insulation tape, assembly instruction



SURGE ARRESTORS

- These surge arrestors or their equivalents are highly recommended for protecting submersible motors from a variety of commonly occurring high voltage spikes which can damage the motor insulation system and cause motor winding failure.
- These arrestors will not, as is true of any surge protection equipment, protect the motor from a direct lightning strike.



TERMINATION KIT 4"

This proven, sturdy solution is your choice of cable joining in temporary pump applications or when re-usage if the drop cable is desired. Furthermore, the flexibility and safety it provides for under field service conditions makes it the preferred choice over conventional, not breakable splicing kits.

- Max. current 18 Ampere in air at max. 50 °C ambient temperature
- Max. current 23 Ampere submersed in water at max. 30 °C ambient temperature
- Max. voltage: 750 V



REVISION CHANGE NOTICE

Rev. No.	Changes	Page
01	New 4" encapsulated Super Stainless motor added	9-10
	Product description VS 4-6-8 / VSC 8-10-12 adjusted	22-23
	Product description 5" close-coupled pumps / VL pump adjusted	24-25
	10" High Efficiency System with rewindable motor added	25
	6" High Efficiency System with rewindable motor deleted	28
02	10" High Efficiency System with rewindable motor added	29
	Picture 4" double plug lead	49
	6" HighTemp 90 description adjusted	13
03	Product description VS 4-6-8 / VSC 8-10-12 adjusted	22-23
	Portfolio description adjusted	5
	4" motor, High thrust version added	9
	4" /6" PM motors: voltage tolerance added, installation orientation adjusted	11,13
	6" High Temp 90 °C motor, description adjusted	13
	8"/10" rewindable PM motors added	18, 20
	10" High Efficiency System, motor ranges adjusted	31
	EV series, new features updated	Cover, 4, 30, 31
	VS 6"-8" series, description updated	22, 23,24
	VN series, "discharge outlet" updated	26
	Booster sets, "versions" updated	36
	EH-EHsp series, description updated	38
	Drainage pumps, description updated	40, 41
	FNEM option added	42
	Corrosion protection 4" motors, description adjusted	50



Franklin Electric

Franklin Electric Europa GmbH
Rudolph-Diesel-Str. 20 - 54516 Wittlich
GERMANY

Phone: +49 (0) 6571 - 105-0
Fax: +49 (0) 6571 - 105-510
Email: info@franklin-electric.de

Franklin Electric S.r.l.
Via Asolo, 7 - 36031 Dueville (Vicenza)
ITALY

Phone: +39 0444 361114
Fax: +39 0444 365247
Email: sales.it@fele.com



10000005490 EN REV.03_06-2021



franklinwater.eu

Single member - Company subject to the control and coordination of Franklin Electric Co., Inc.
Franklin Electric reserves the right to amend specification without prior notice.